



Machine Learning-based Beam Size Stabilization

Simon C. Leemann

ALS Accelerator Physics, ATAP & ALS Divisions, Lawrence Berkeley National Laboratory
Sep 17, 2020



IBIC 2020 – 9th International Beam Instrumentation Conference (Remote), Sep 14-18, 2020



U.S. DEPARTMENT OF
ENERGY

Office of
Science




ACCELERATOR TECHNOLOGY &
APPLIED PHYSICS DIVISION **ATAP**



Many Successful Efforts to Stabilize Electron Beams


- **Top-off** keeps ALS stored current variation $<0.2\%$

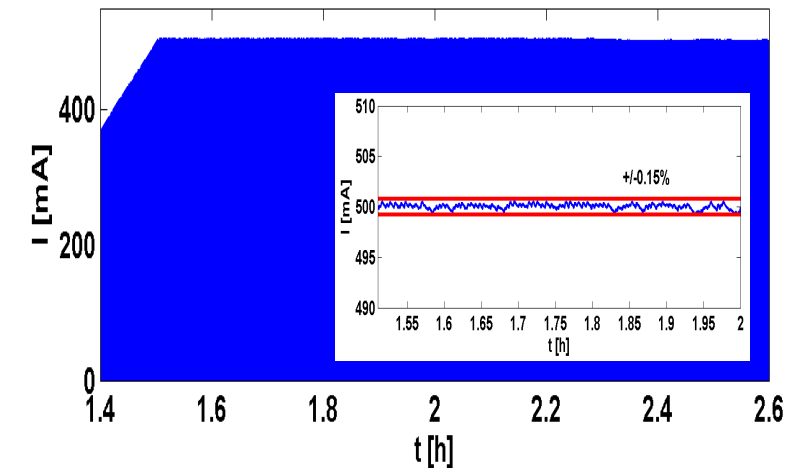



Courtesy: C. Steier, PAC'09

Many Successful Efforts to Stabilize Electron Beams

- **Top-off** keeps ALS stored current variation $<0.2\%$
- At low energy, ALS strongly affected by ID imperfections & continuously changing EPU gaps/phases
 - **Orbit feedback** and ID feed-forwards stabilize source positions/angles to **sub-micron** level at many tens of Hz


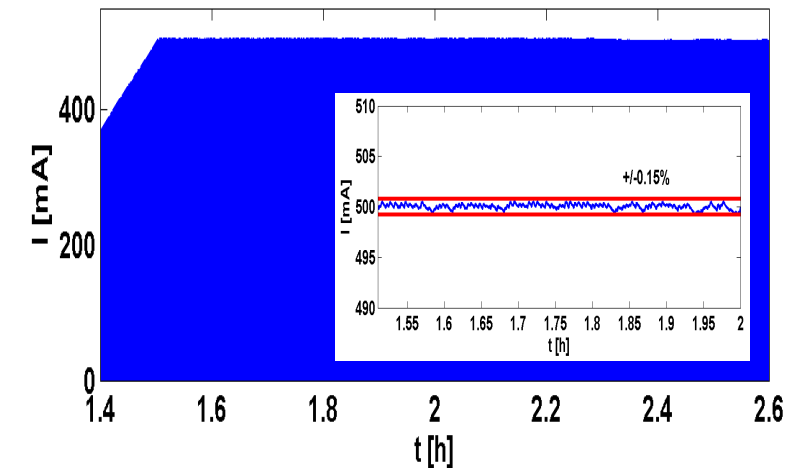


Courtesy: C. Steier, PAC'09

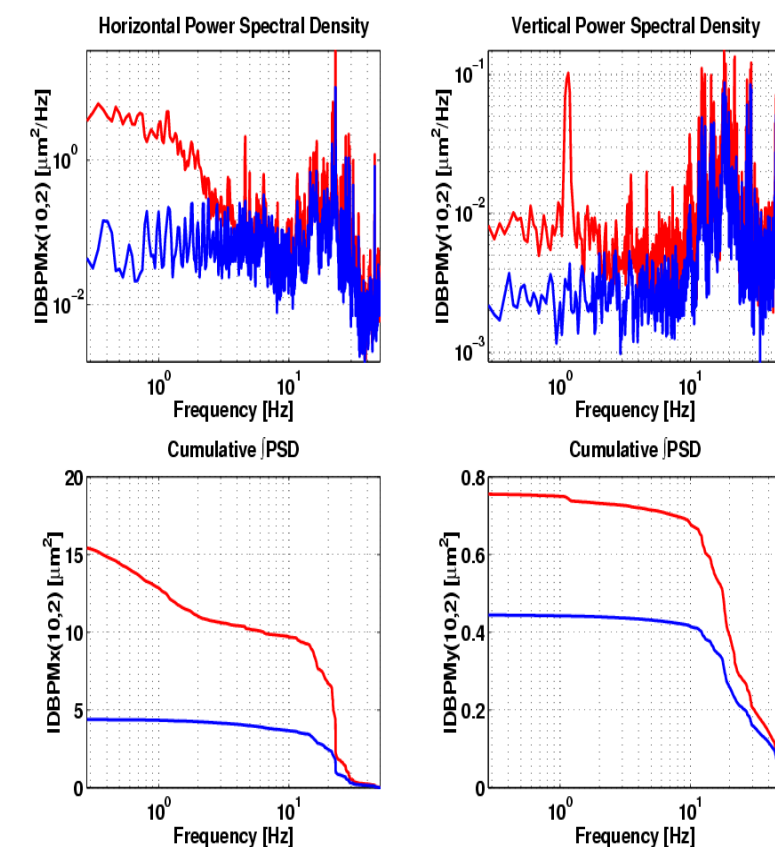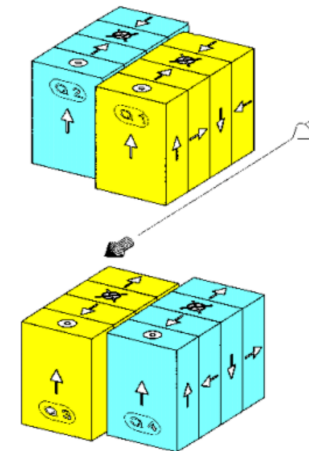


Many Successful Efforts to Stabilize Electron Beams

- **Top-off** keeps ALS stored current variation $<0.2\%$
- At low energy, ALS strongly affected by ID imperfections & continuously changing EPU gaps/phases
 - **Orbit feedback** and ID feed-forwards stabilize source positions/angles to **sub-micron** level at many tens of Hz
 - **ID feed-forwards** & tune feedback stabilize optics at source points
 - **ID skew feed-forwards** stabilize source size
 - require recording lookup tables (time consuming)
 - tables are imperfect and **machine drifts** over time

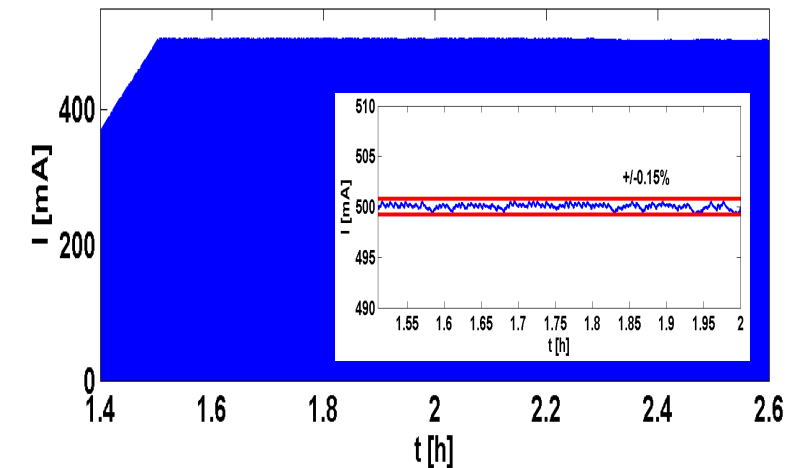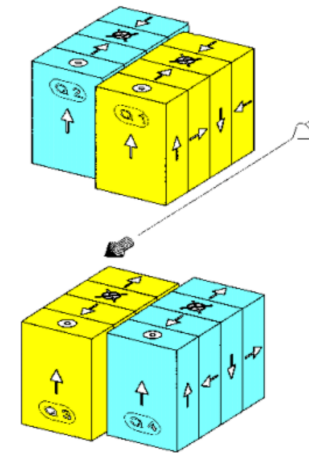


Courtesy: C. Steier, PAC'09

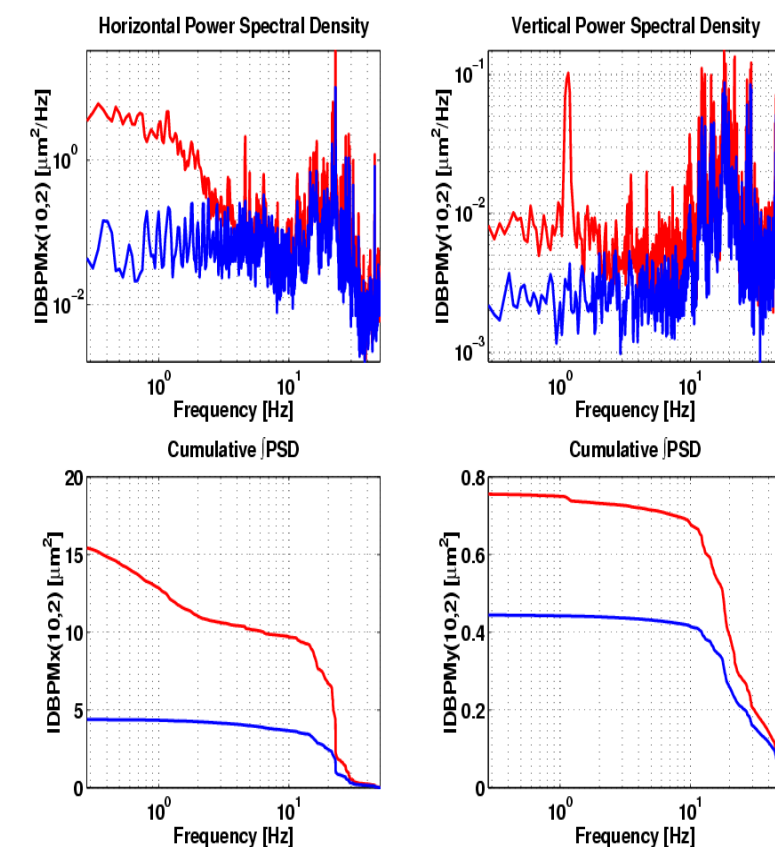

Thermal, Ground, Water Table, etc.


The Problem: Beam Size vs. ID Motion

- Nevertheless, during routine user ops observe vertical source size variations when ID configurations change

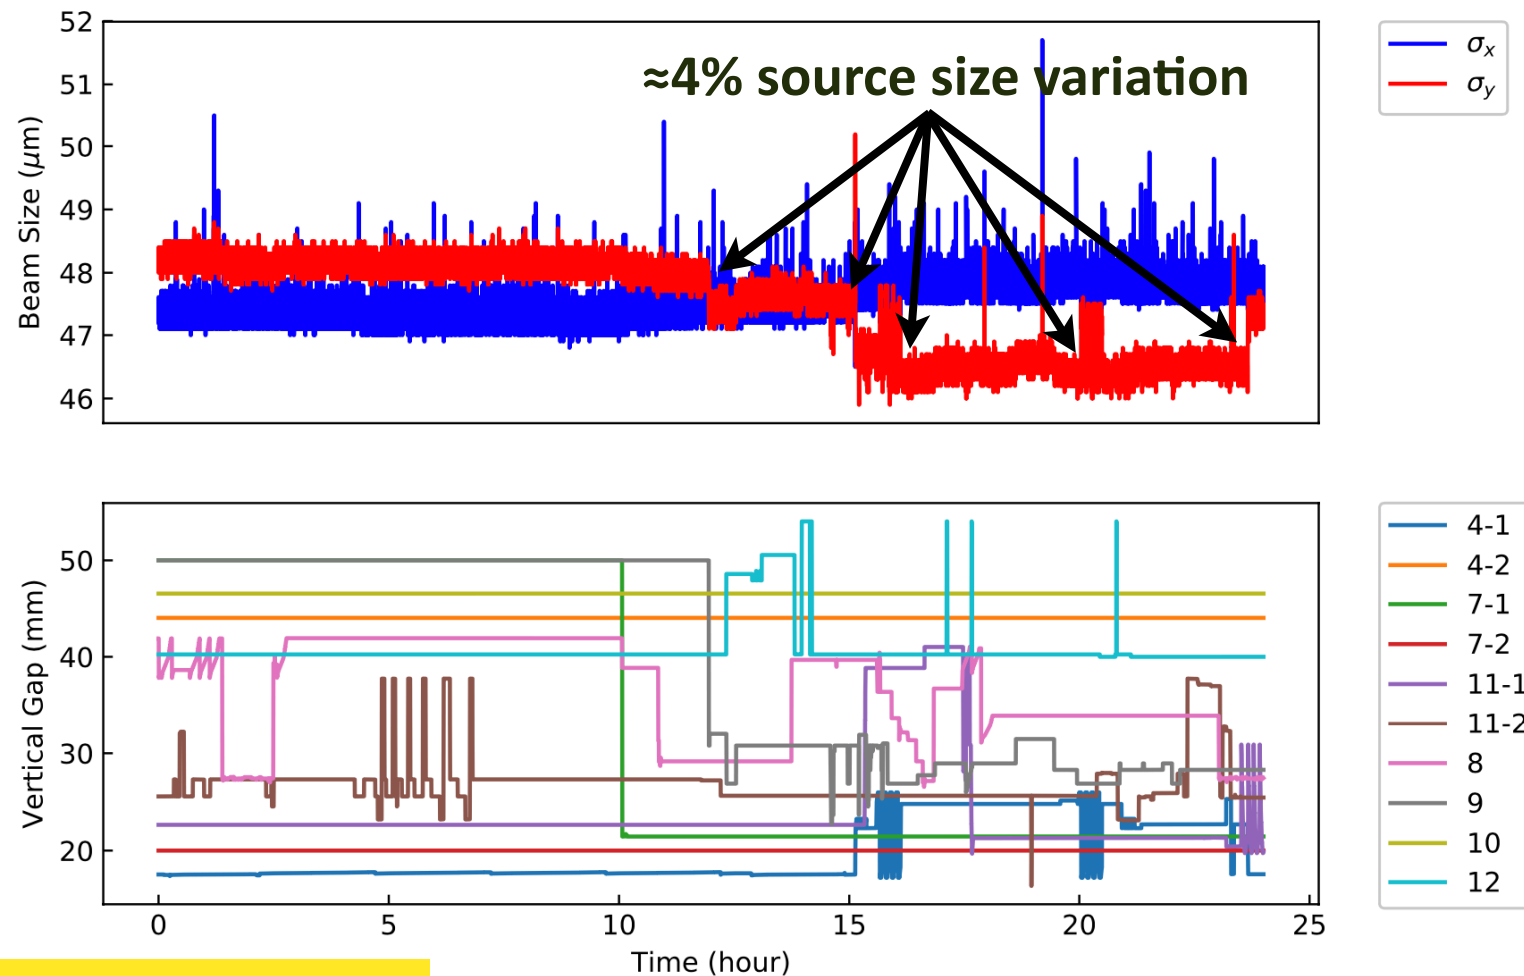

PRL **123**, 194801 (2019)

ALS Diagnostic Beamline 3.1

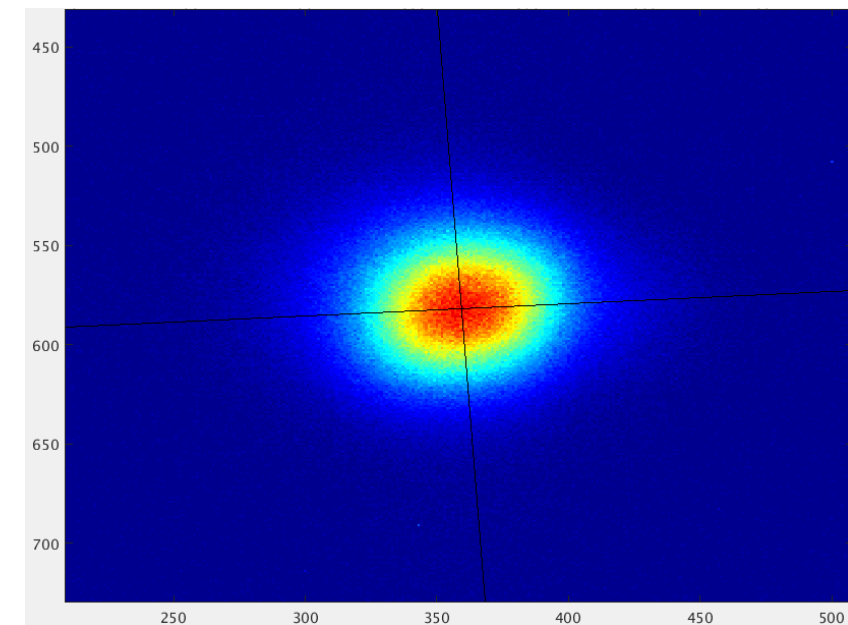

SR from 1st arc dipole ("round beam") \rightarrow
KB mirrors \rightarrow C filter \rightarrow 1-3 keV x-rays \rightarrow
LYSO scintillator crystal \rightarrow visible \rightarrow CCD

Rev. Sci. Instrum. **67**, 3368 (1996)

- Traditionally 3rd-gen. sources considered $<10\%$ acceptable, but...

How this Problem Affects Sensitive Experiments

- Vertical source size fluctuations show up as intensity variations at highly sensitive beamlines, such as the STXM at ALS beamline 5.3.2.2
 - STXM zone plate focal length ≈ 1 mm \rightarrow no independent & reliable I_0 measurement
 - Very small spot size in focus (>20 nm \rightarrow scan $>10 \times 10$ μm^2)
 - Fast raster scanning for differential measurements \rightarrow no averaging (≈ 1 ms/pixel, 1 s/line, 6 min/scan)
 - Monochromator plane is H \rightarrow V source size fluctuations directly affect experimental noise floor
- 4th-gen. rings such as ALS-U will be equipped with many more such highly sensitive beamlines: STXM, XPCS, ptychography, etc.




PRL **123**, 194801 (2019)

Need to Solve This Problem at the Source

- Why use **Machine Learning (ML)** to attack this issue?
 - ML can model highly nonlinear processes and is extremely flexible
 - ML does not require a priori understanding underlying physics (e.g. machine drift) → but allows extracting valuable system information a posteriori
 - ML can substantially outperform conventional fitting (polynomial regression)
- ML requires reproducible events → confirmed in experiments
- ML ideally requires large data sets for training → ALS digital control system can provide that

Need to Solve This Problem at the Source

- Why use **Machine Learning (ML)** to attack this issue?

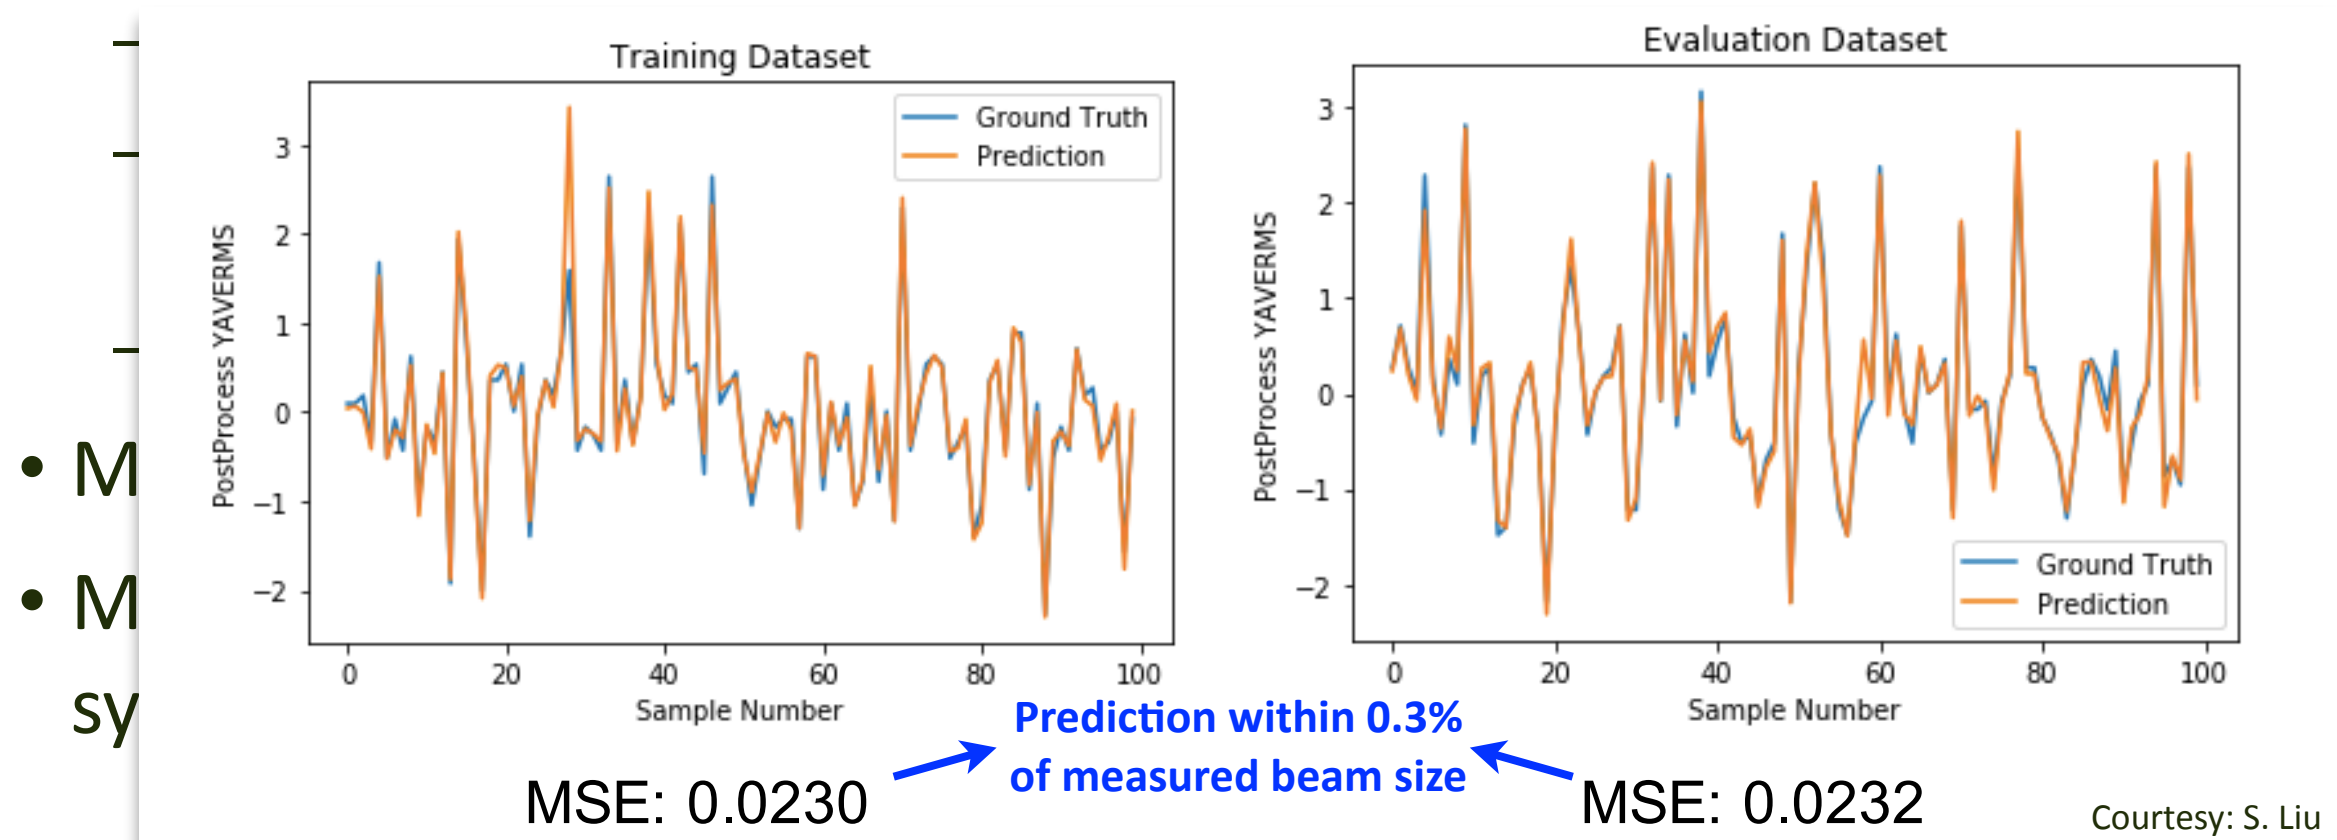

- First example: offline analysis of user ops data
 - 26 ID parameters ("input") → predict V beam size @ BL3.1 ("output")
 - Recorded 8 Msamples @ 10 Hz → 6 Msamples used for training, 2 Msamples for validation → training took 30 min on powerful GPU


Need to Solve This Problem at the Source

- Why use ML

- ML can n
- ML does (drift) → b
- ML can s

- ML require

- ML ideally system car

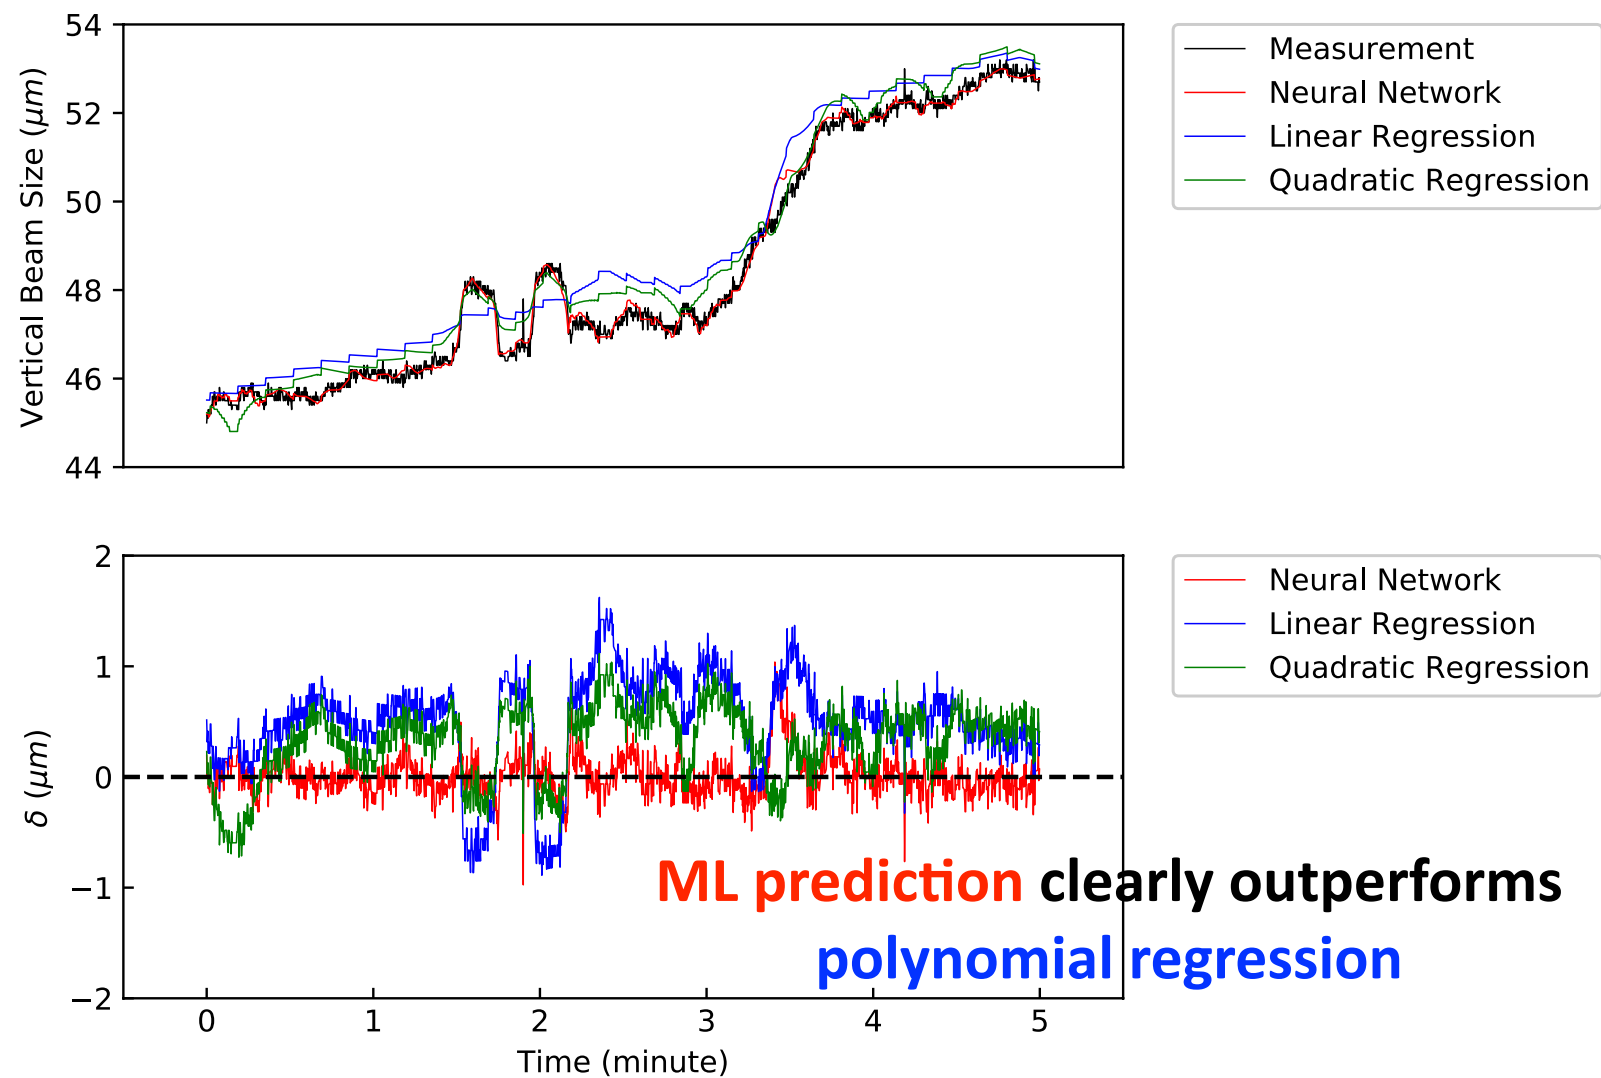



- First example: offline analysis of user ops data

PRL 123, 194801 (2019)

- 26 ID parameters ("input") → predict V beam size @ BL3.1 ("output")
- Recorded 8 Msamples @ 10 Hz → 6 Msamples used for training, 2 Msamples for validation → training took 30 min on powerful GPU

From Prediction to Correction


- Introduced "dispersion wave parameter" (DWP) to modify standard ALS dispersion wave (skew quadrupole excitation pattern) → allows adjusting vertical emittance (global conserved quantity)

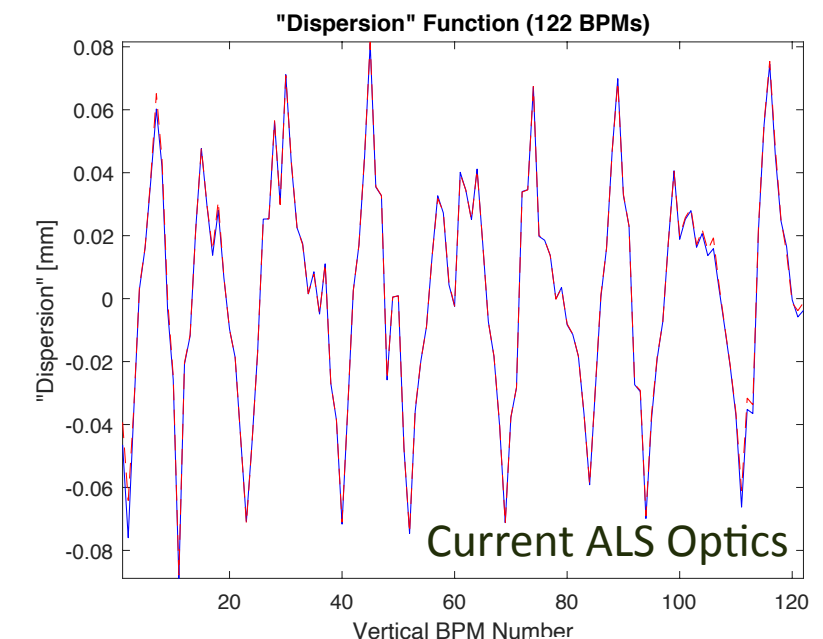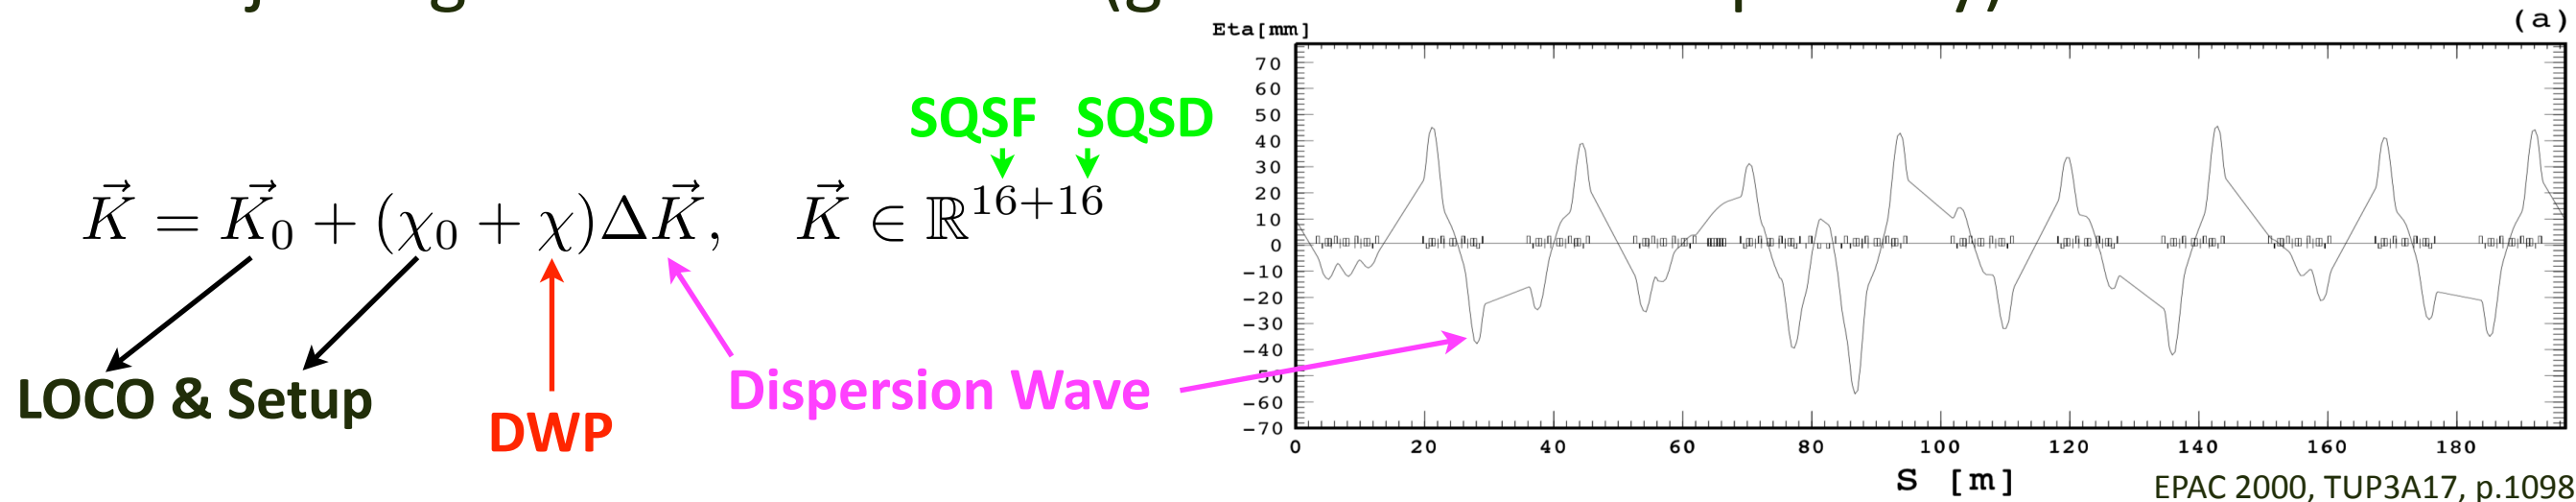


From Prediction to Correction (cont.)

- Introduce ALS dispersion adjustment


$\vec{K} = \vec{K}_0 +$
 LOCO & Setup

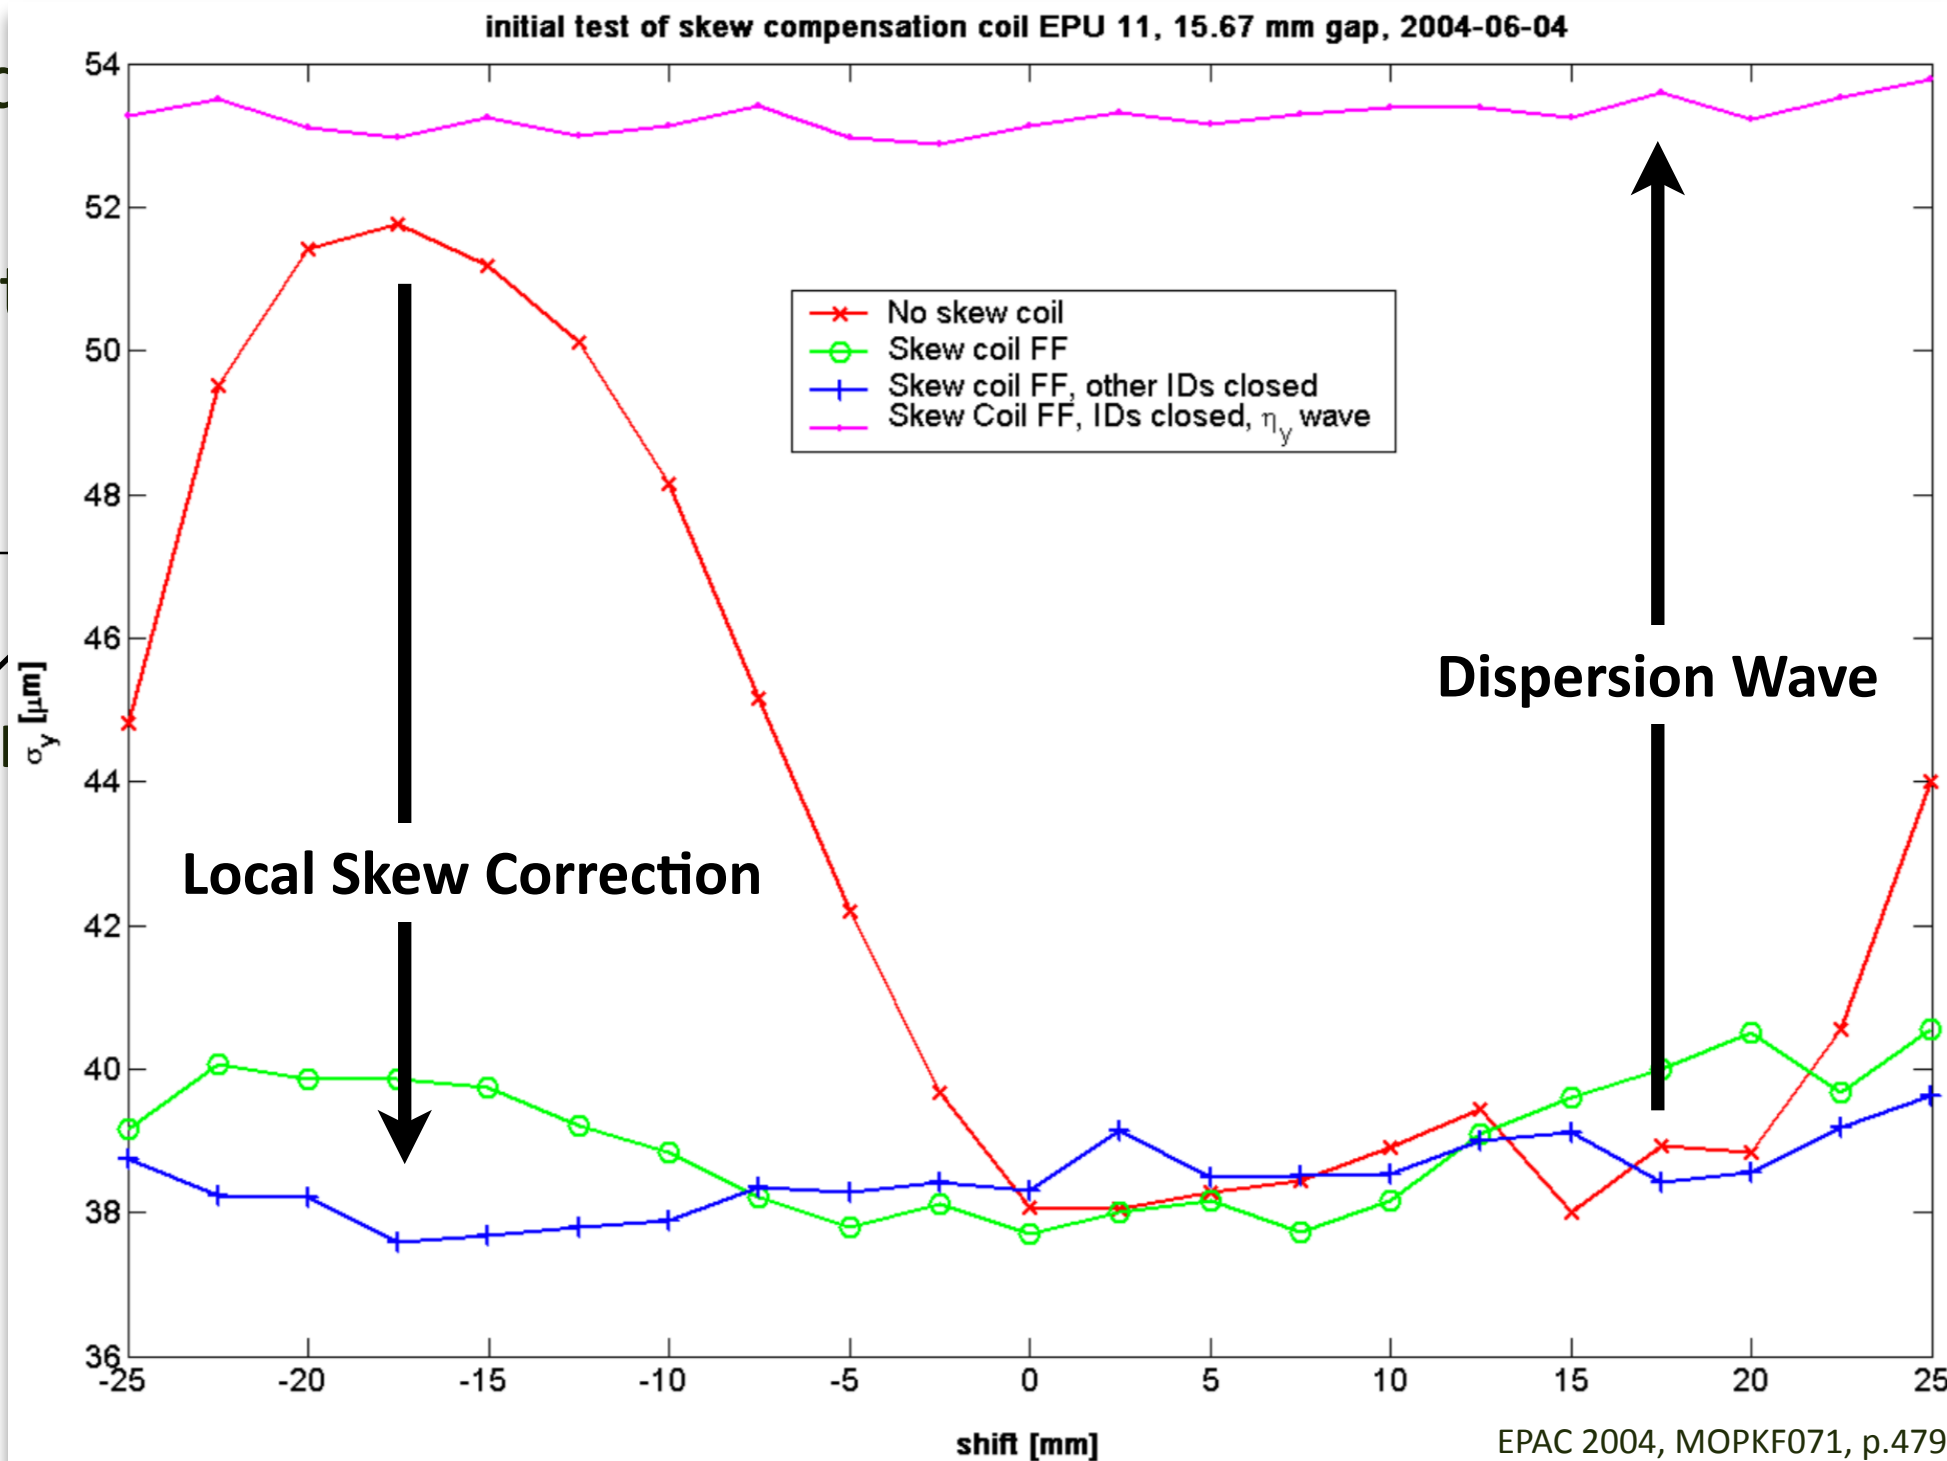

Standard
 lows

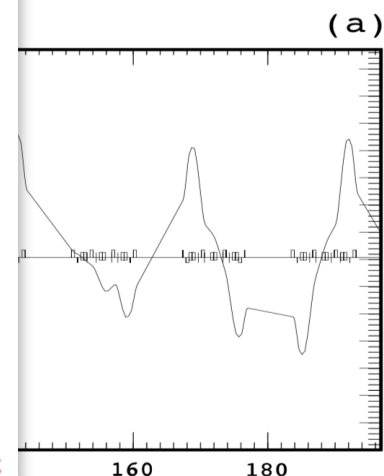


2000, TUP3A17, p.1098

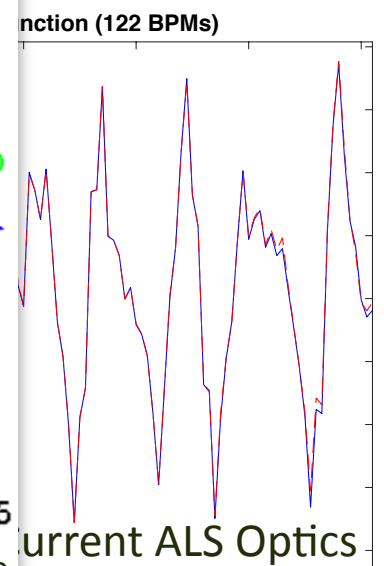


Vertical BPM Number

From Prediction to Correction (cont.)

- Introduced "dispersion wave parameter" (DWP) to modify standard ALS dispersion wave (skew quadrupole excitation pattern) → allows adjusting vertical emittance (global conserved quantity)

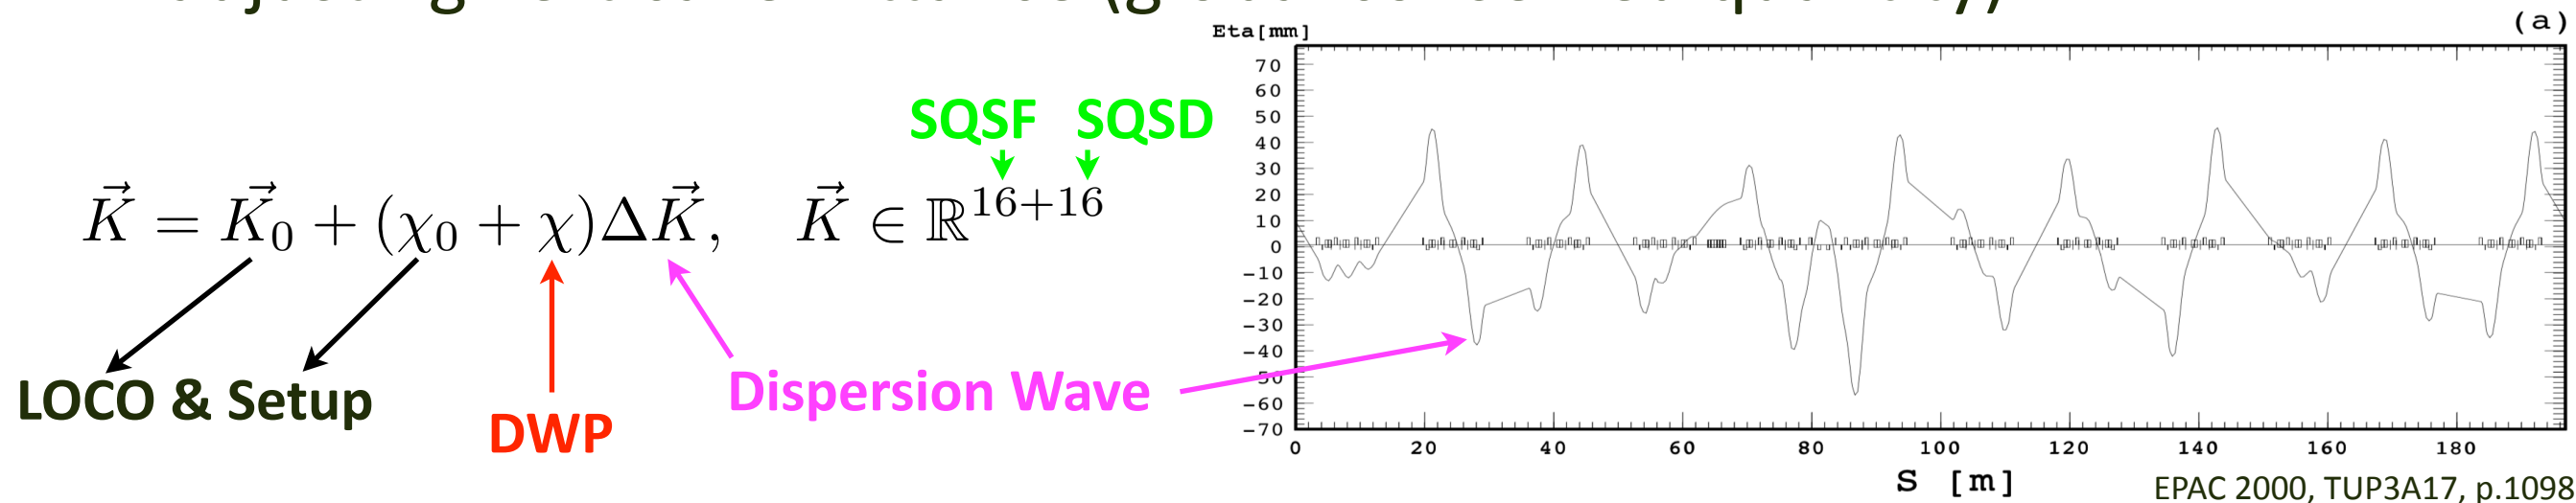


- Observed varying ID configurations affect primarily vertical dispersion → ε_y
- Can therefore stabilize beam size globally by adjusting DWP

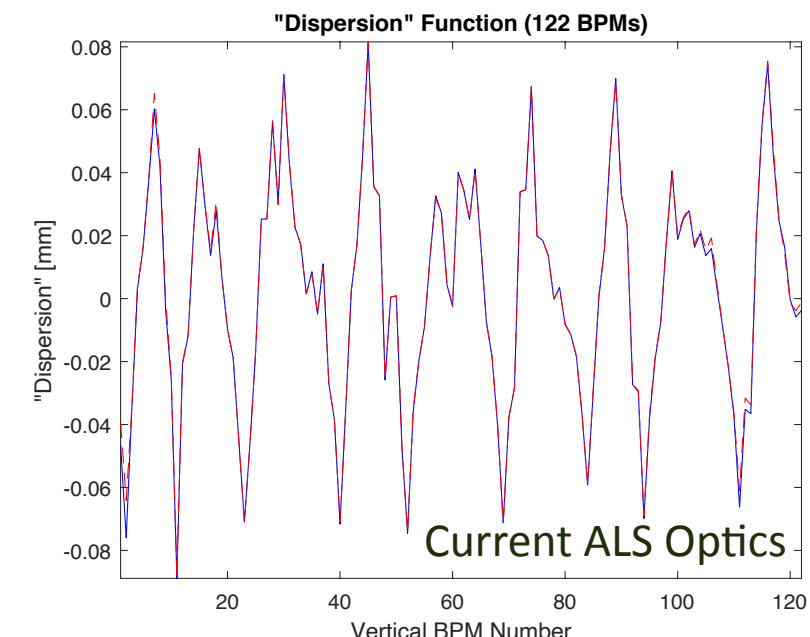

Building a NN-based ID Feed-Forward

- Training: measure beam sizes while scanning DWP & various ID configurations → acquire data at 10 Hz → input for *training* of NN (DL)

Deep Learning

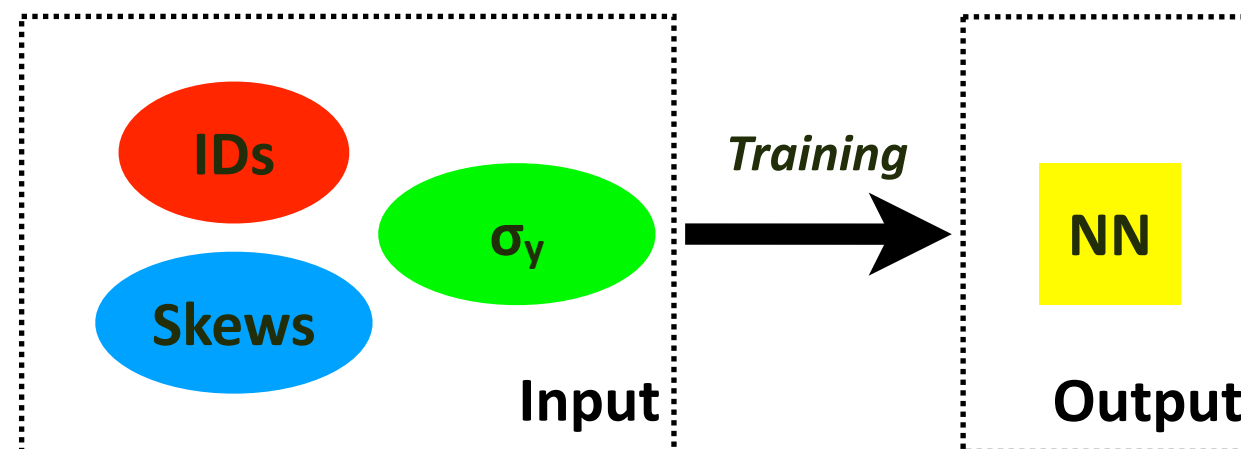


- *Requires only large amounts of data & reproducibility*

Building a NN-based ID Feed-Forward


- Training: measure beam sizes while scanning DWP & various ID configurations → acquire data at 10 Hz → input for **training** of NN (DL)
- Result of DL is **prediction** for DWP required to keep beam size constant for arbitrary ID configurations → run as NN-based ID FF

Deep Learning

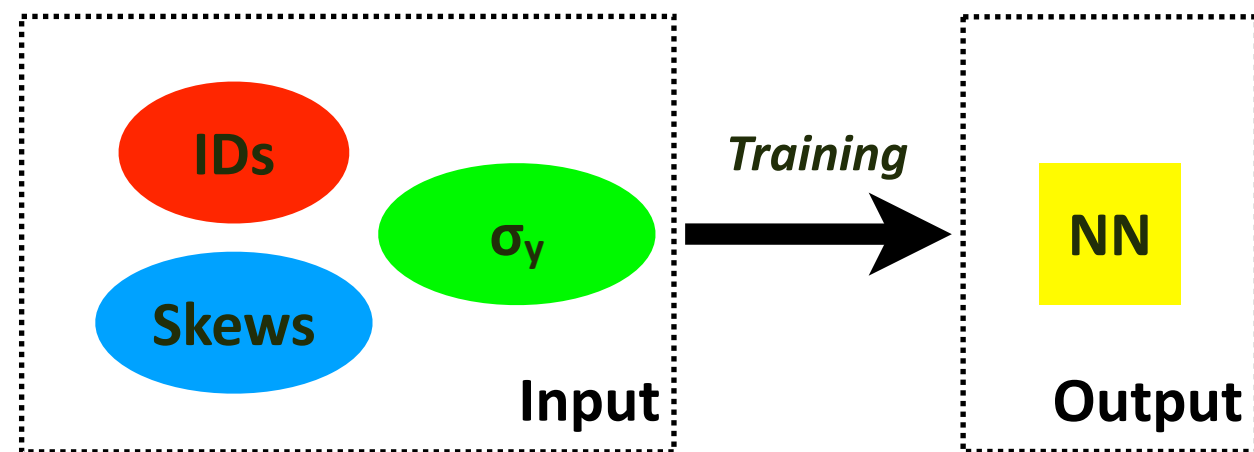


- Requires only large amounts of data & reproducibility


Application during ops

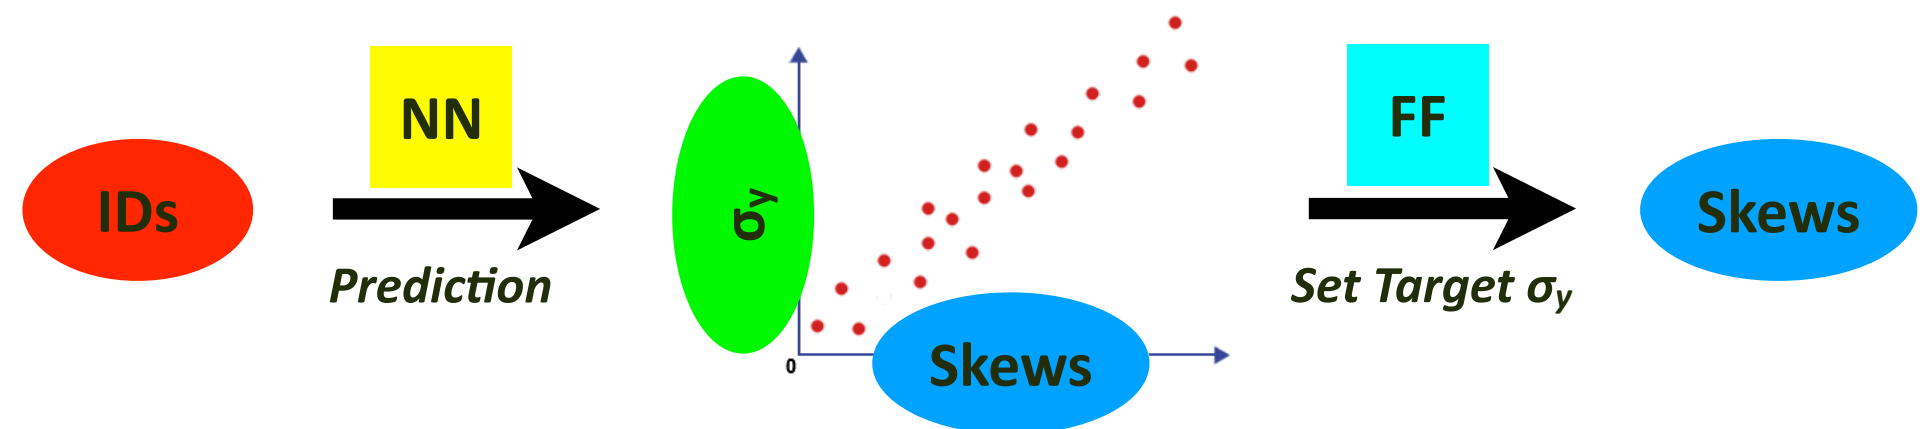


How a Neural Network (NN) Works

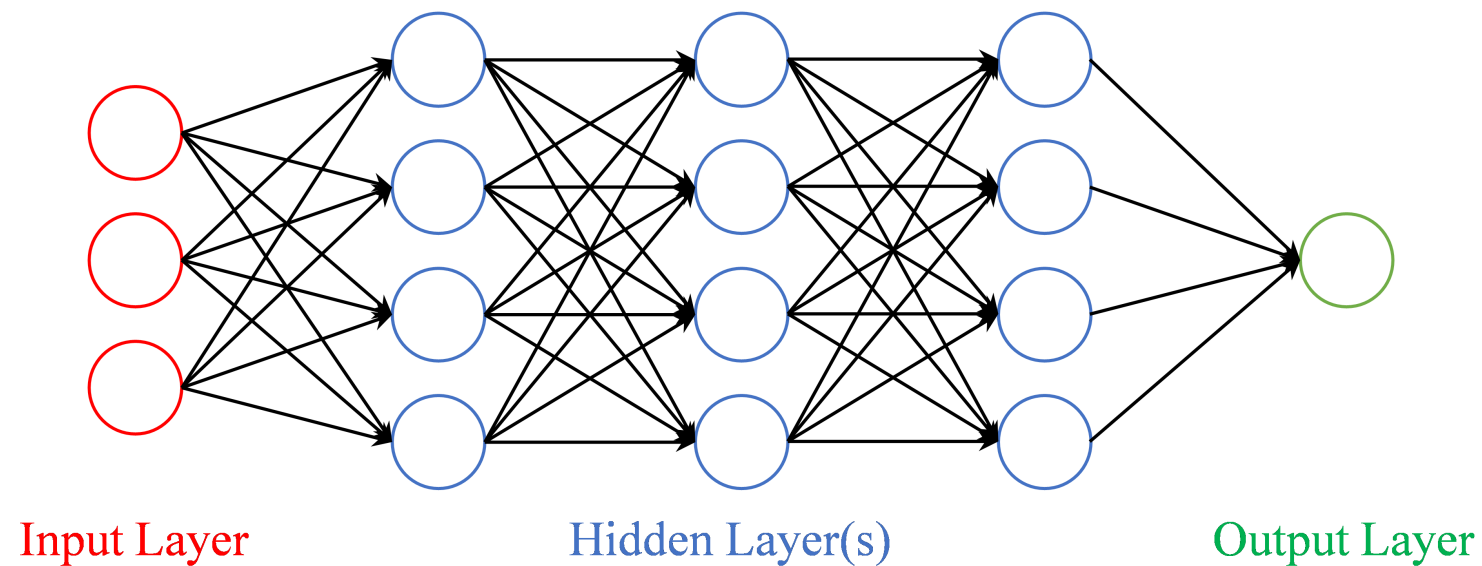

Courtesy: S. Liu

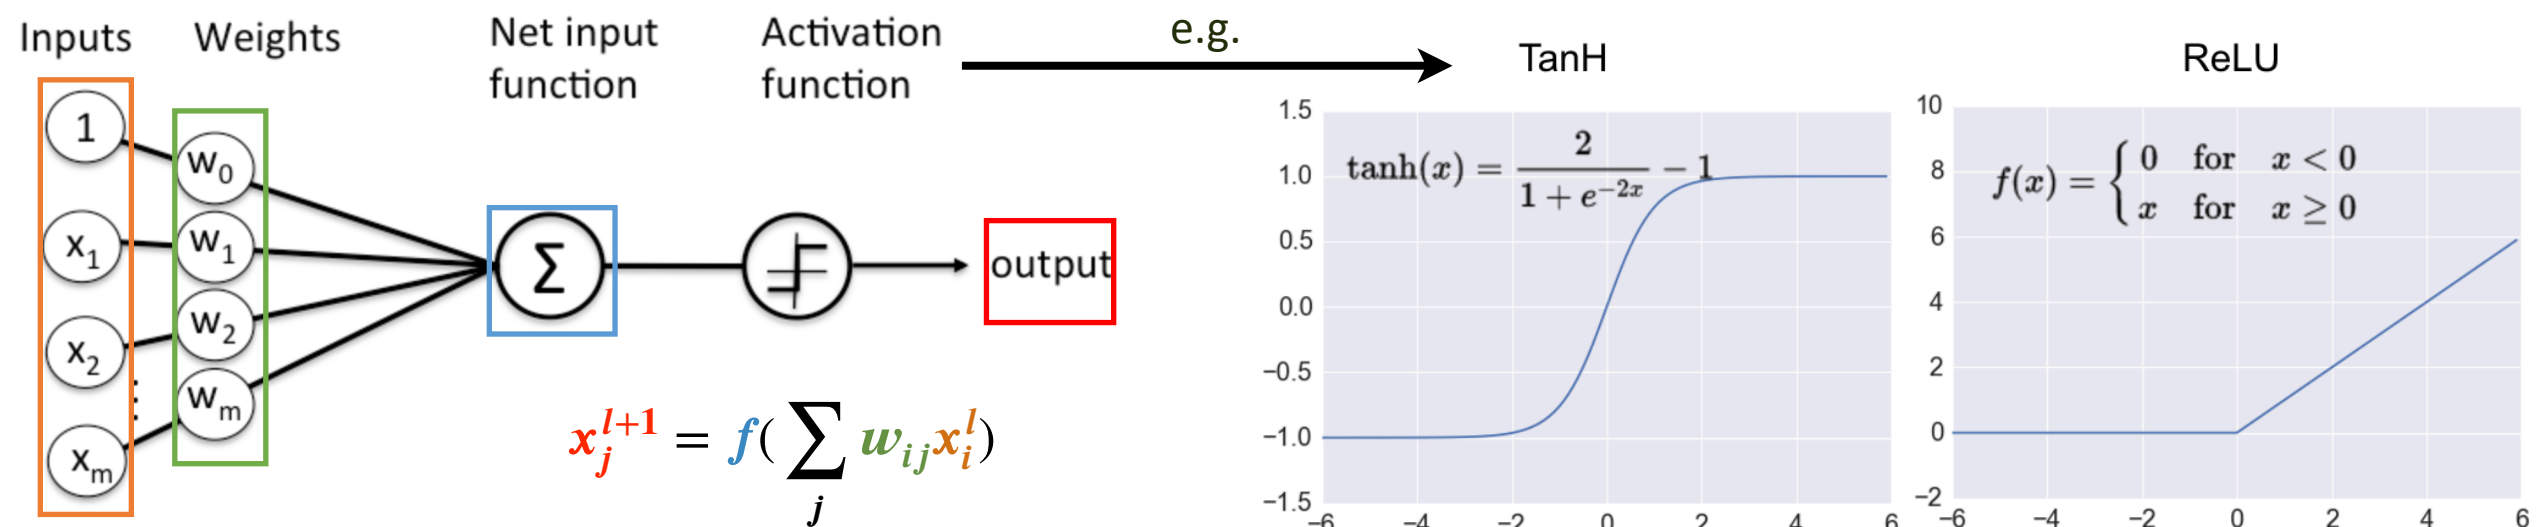

Deep Learning: How we Trained the NN

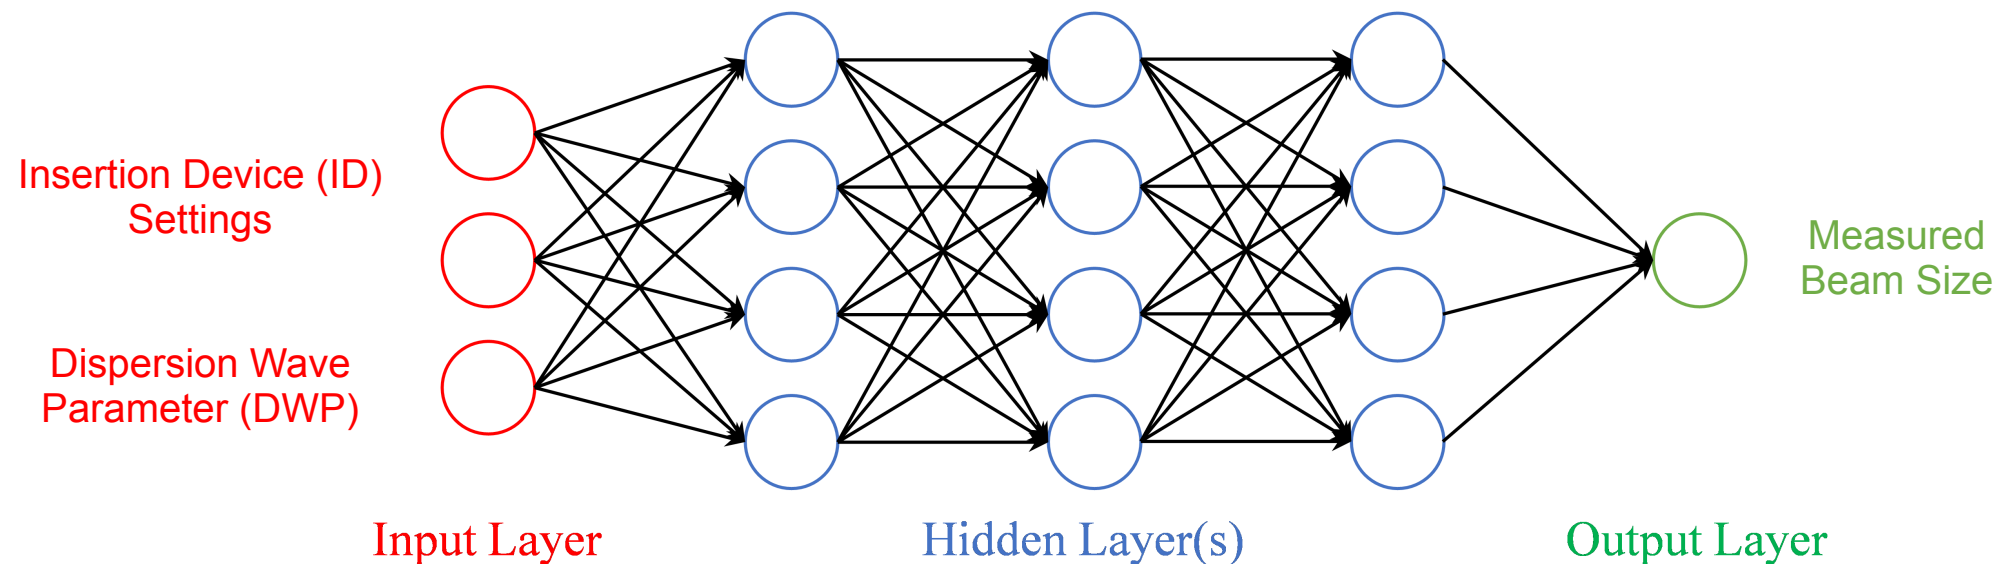

Input Layer: ID settings (22-35 Dimension) and DWP (1 Dimension)


Three Hidden Fully Connected Layers:

128, 64, 32 neurons in each layer

Output Layer: Vertical Beam Size (1 Dimension)

Regularization: L_2 regularizer with $\lambda = 10^{-4}$


Optimization: Adam Optimizer with learning rate $\alpha = 10^{-3}$

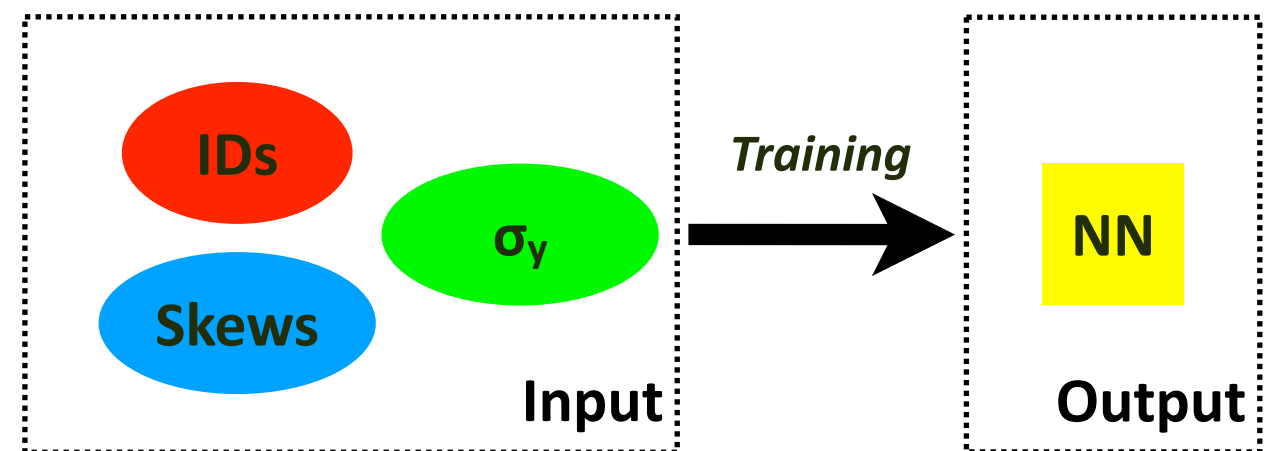

Architecture	Raw Data		With Square Features	
	Training MSE	Evaluation MSE	Training MSE	Evaluation MSE
128-64	0.0265	0.0268	0.0257	0.0260
256-64	0.0243	0.0245	0.0259	0.0262
512-128	0.0243	0.0247	0.0243	0.0247
128-64-32	0.0238	0.0242	0.0243	0.0245
256-128-64	0.0236	0.0240	0.0240	0.0246
256-128-64-32	0.0245	0.0249	0.0245	0.0248

PRL 123, 194801 (2019)

Resulting NN Enables ID Feed-Forward at ≈ 3 Hz

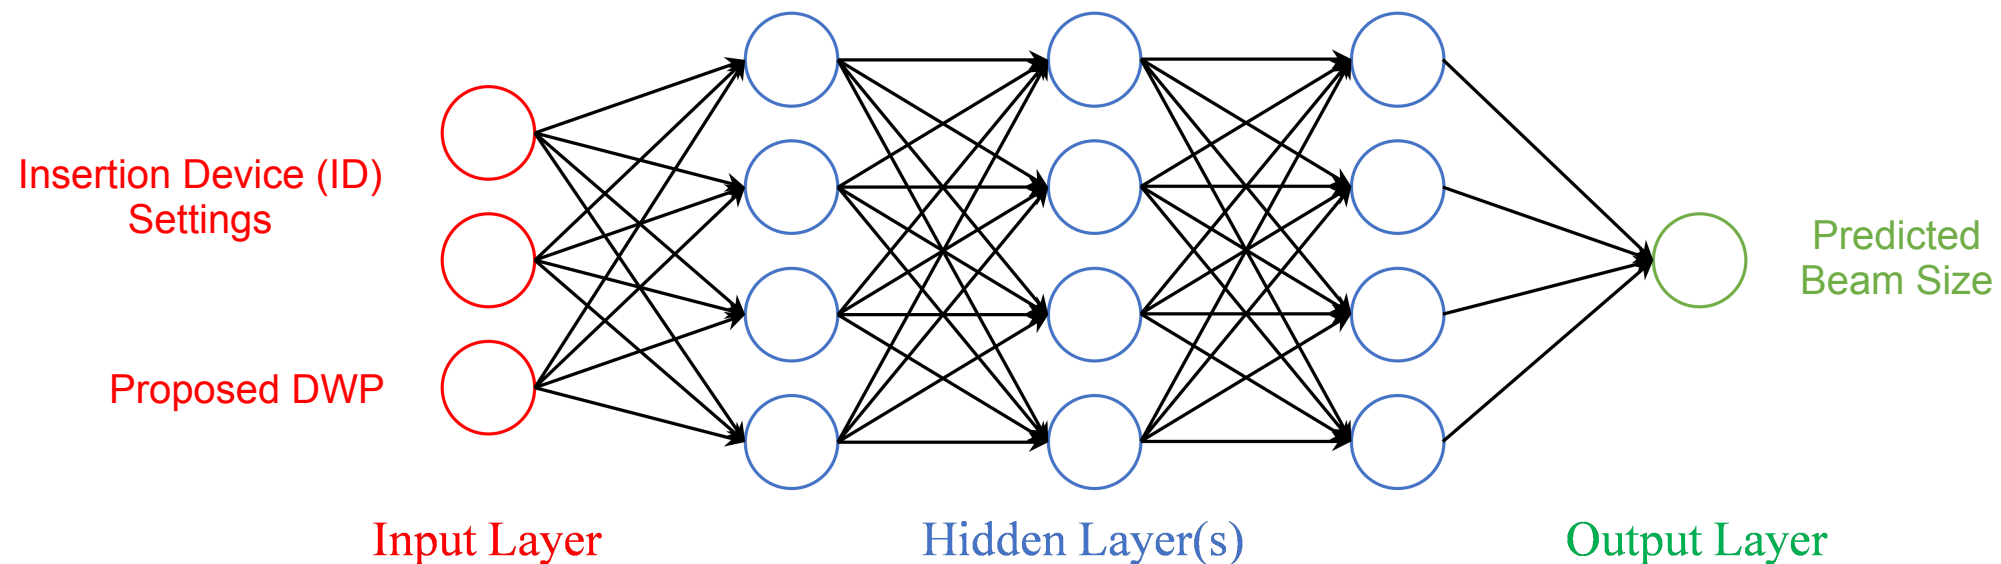

Proposed DWPs

-0.06
....
0
...
0.06


Measured ID Settings
Neural Network

Predicted Beam Sizes

50.3
....
52.1
...
54.0


Compare with Target
Beam Size

Choose proper DWP

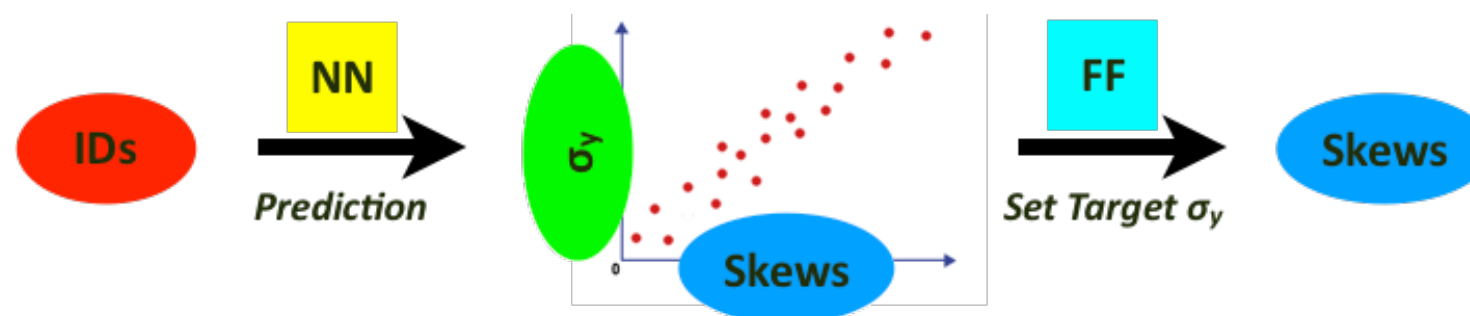


PRL 123, 194801 (2019)


Physics Shift: Data Collection for NN Training

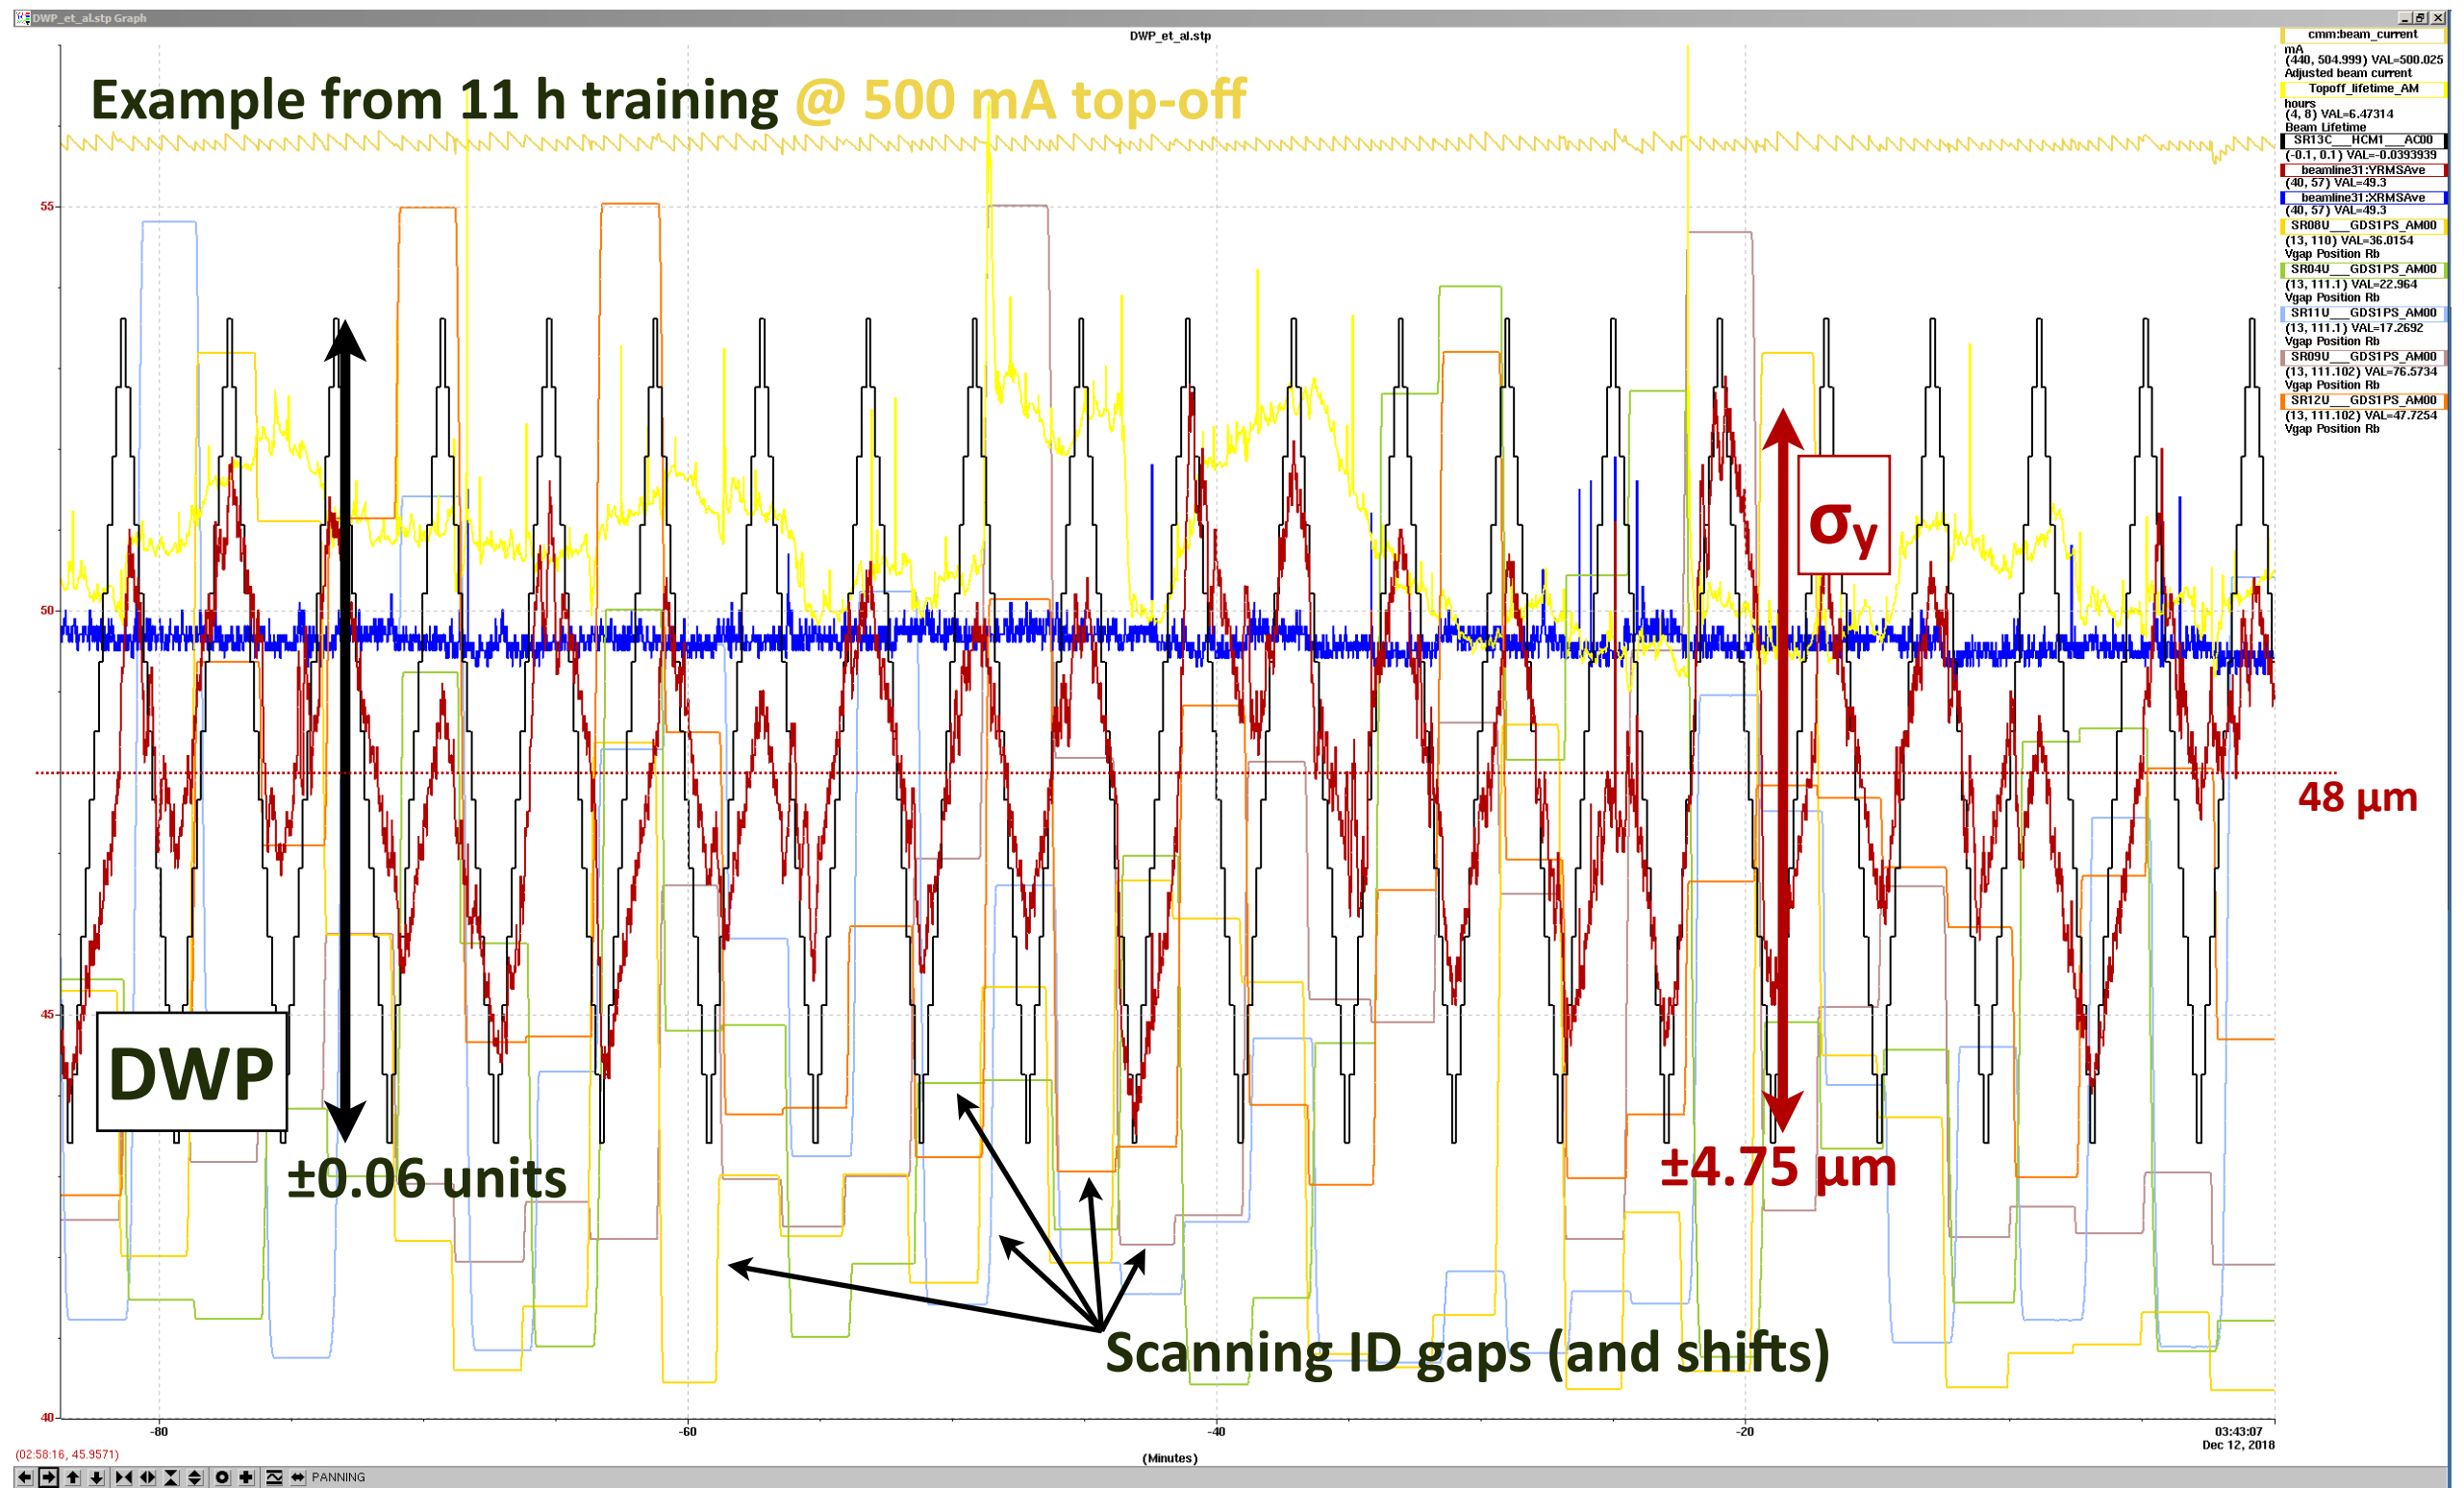

Physics Shift: Running NN-based ID Feed-Forward

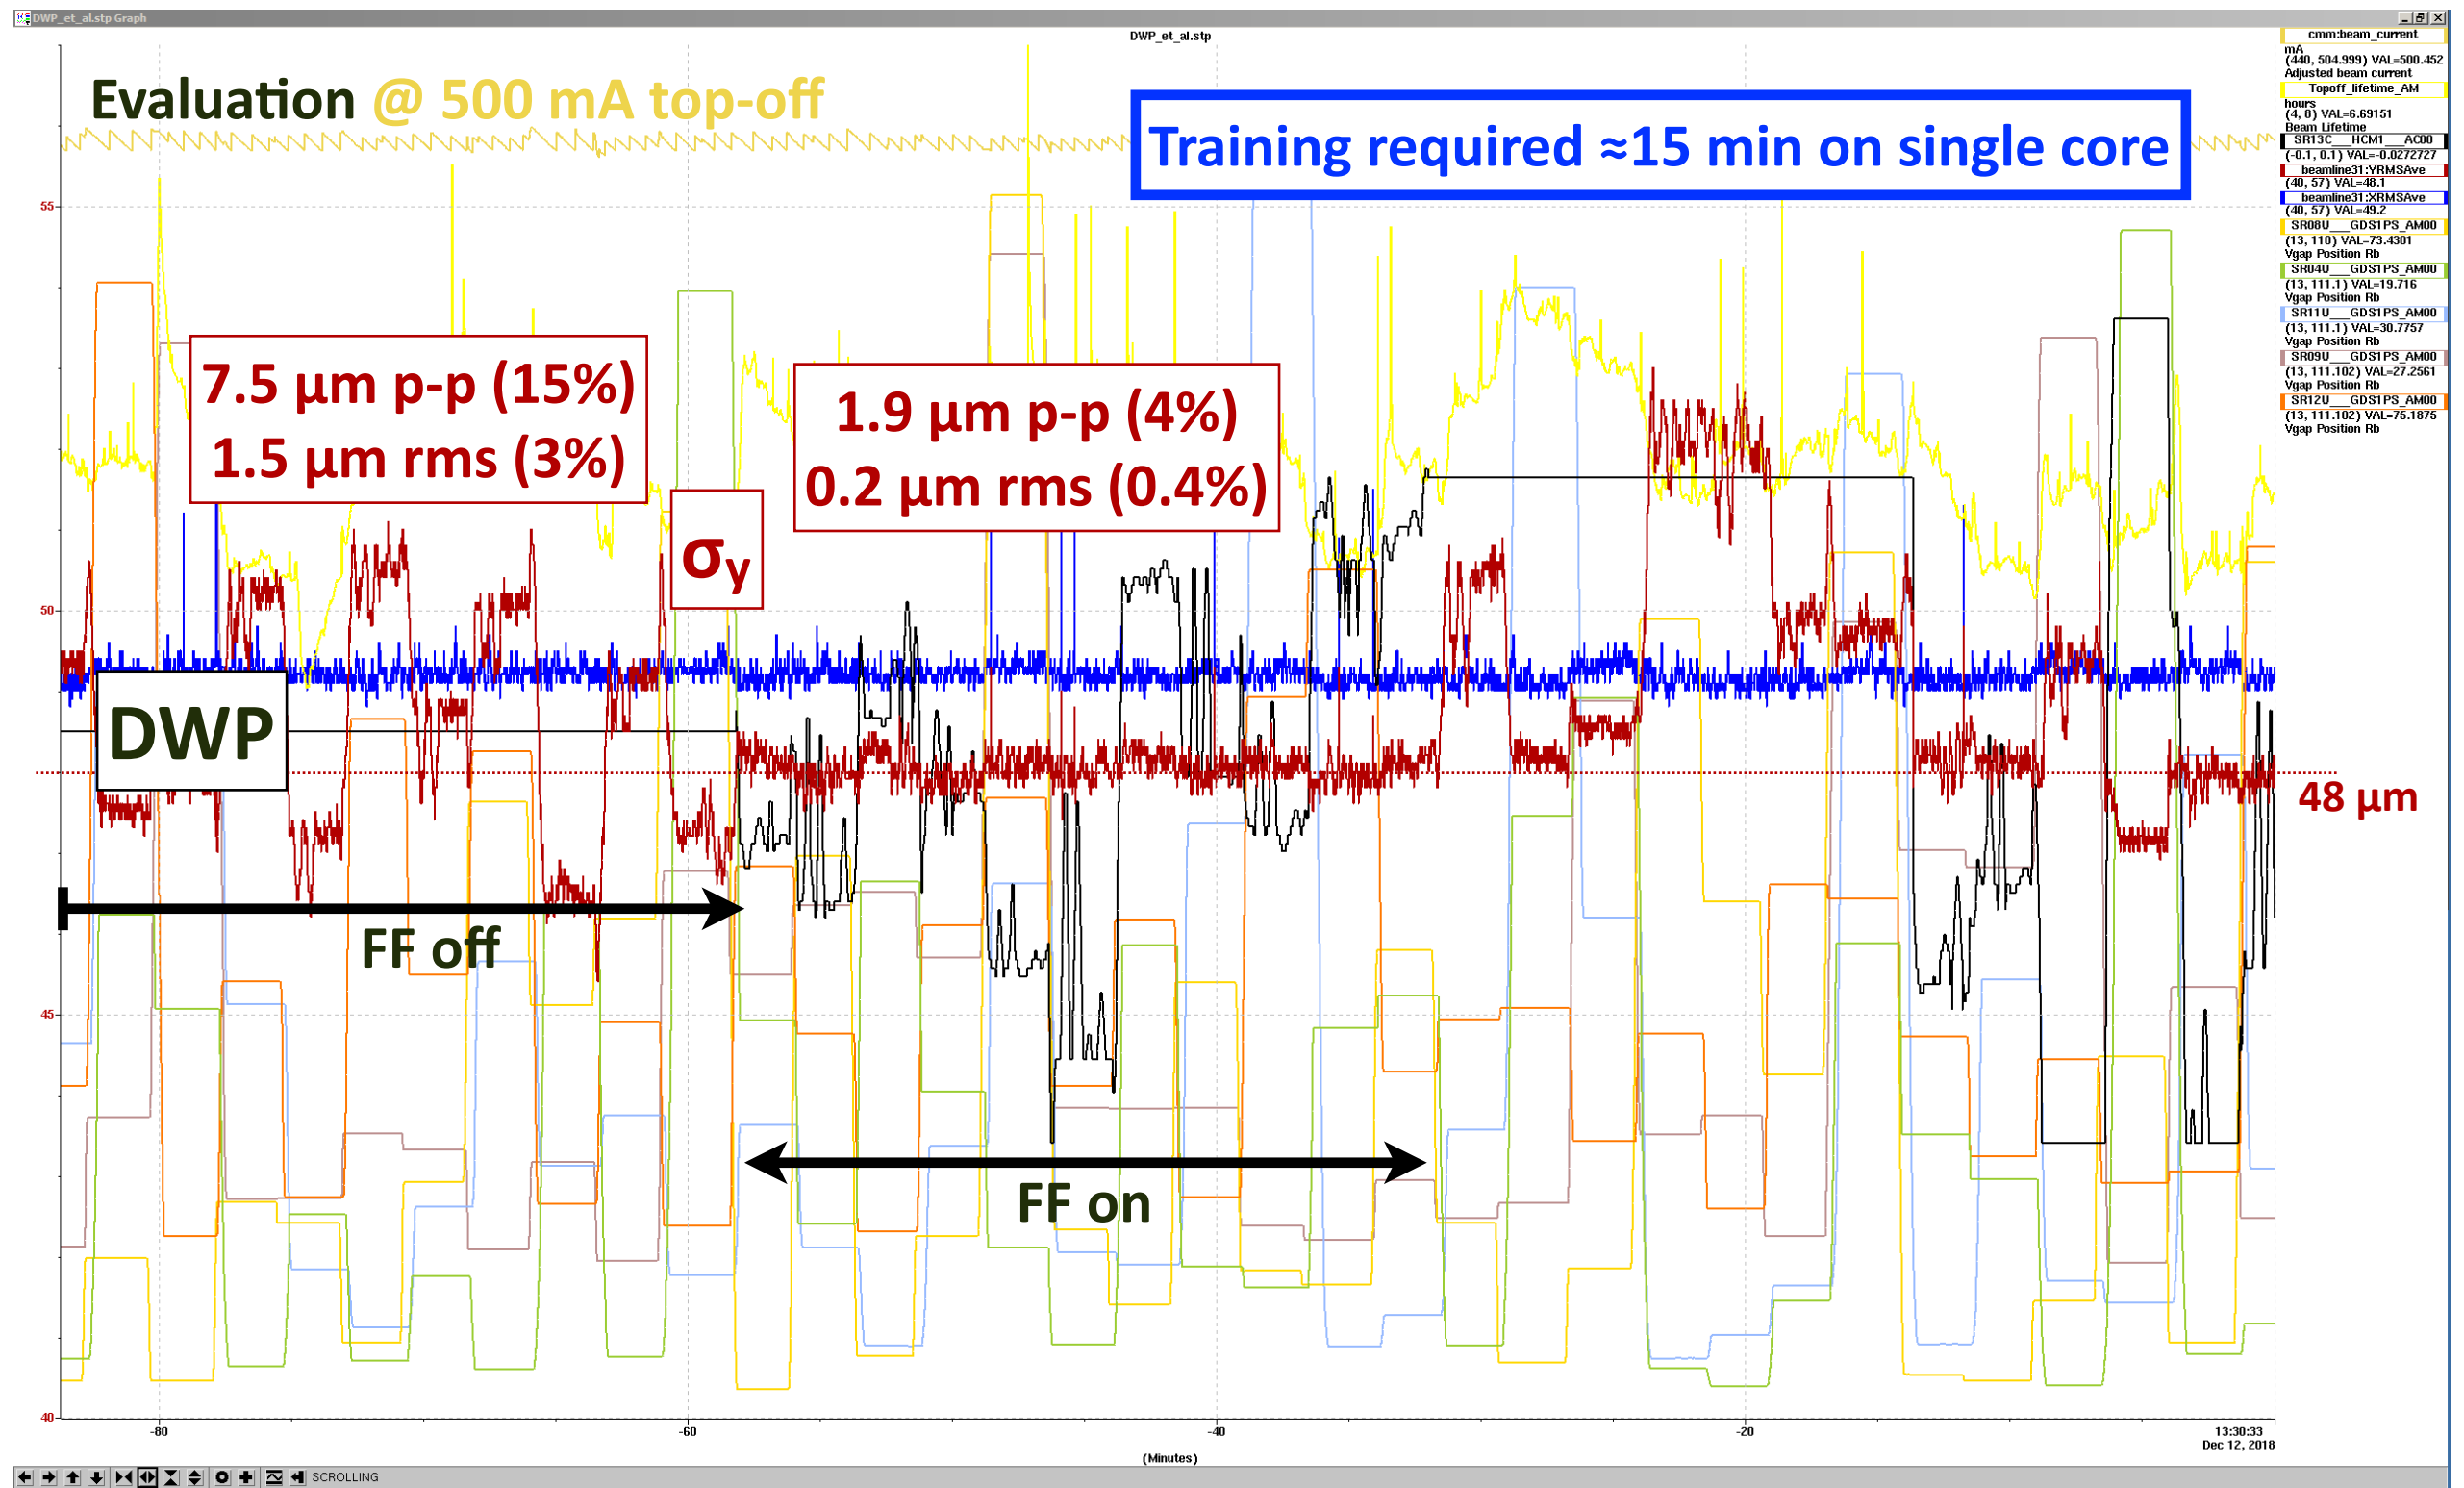

Physics Shift: Running NN-based ID Feed-Forward

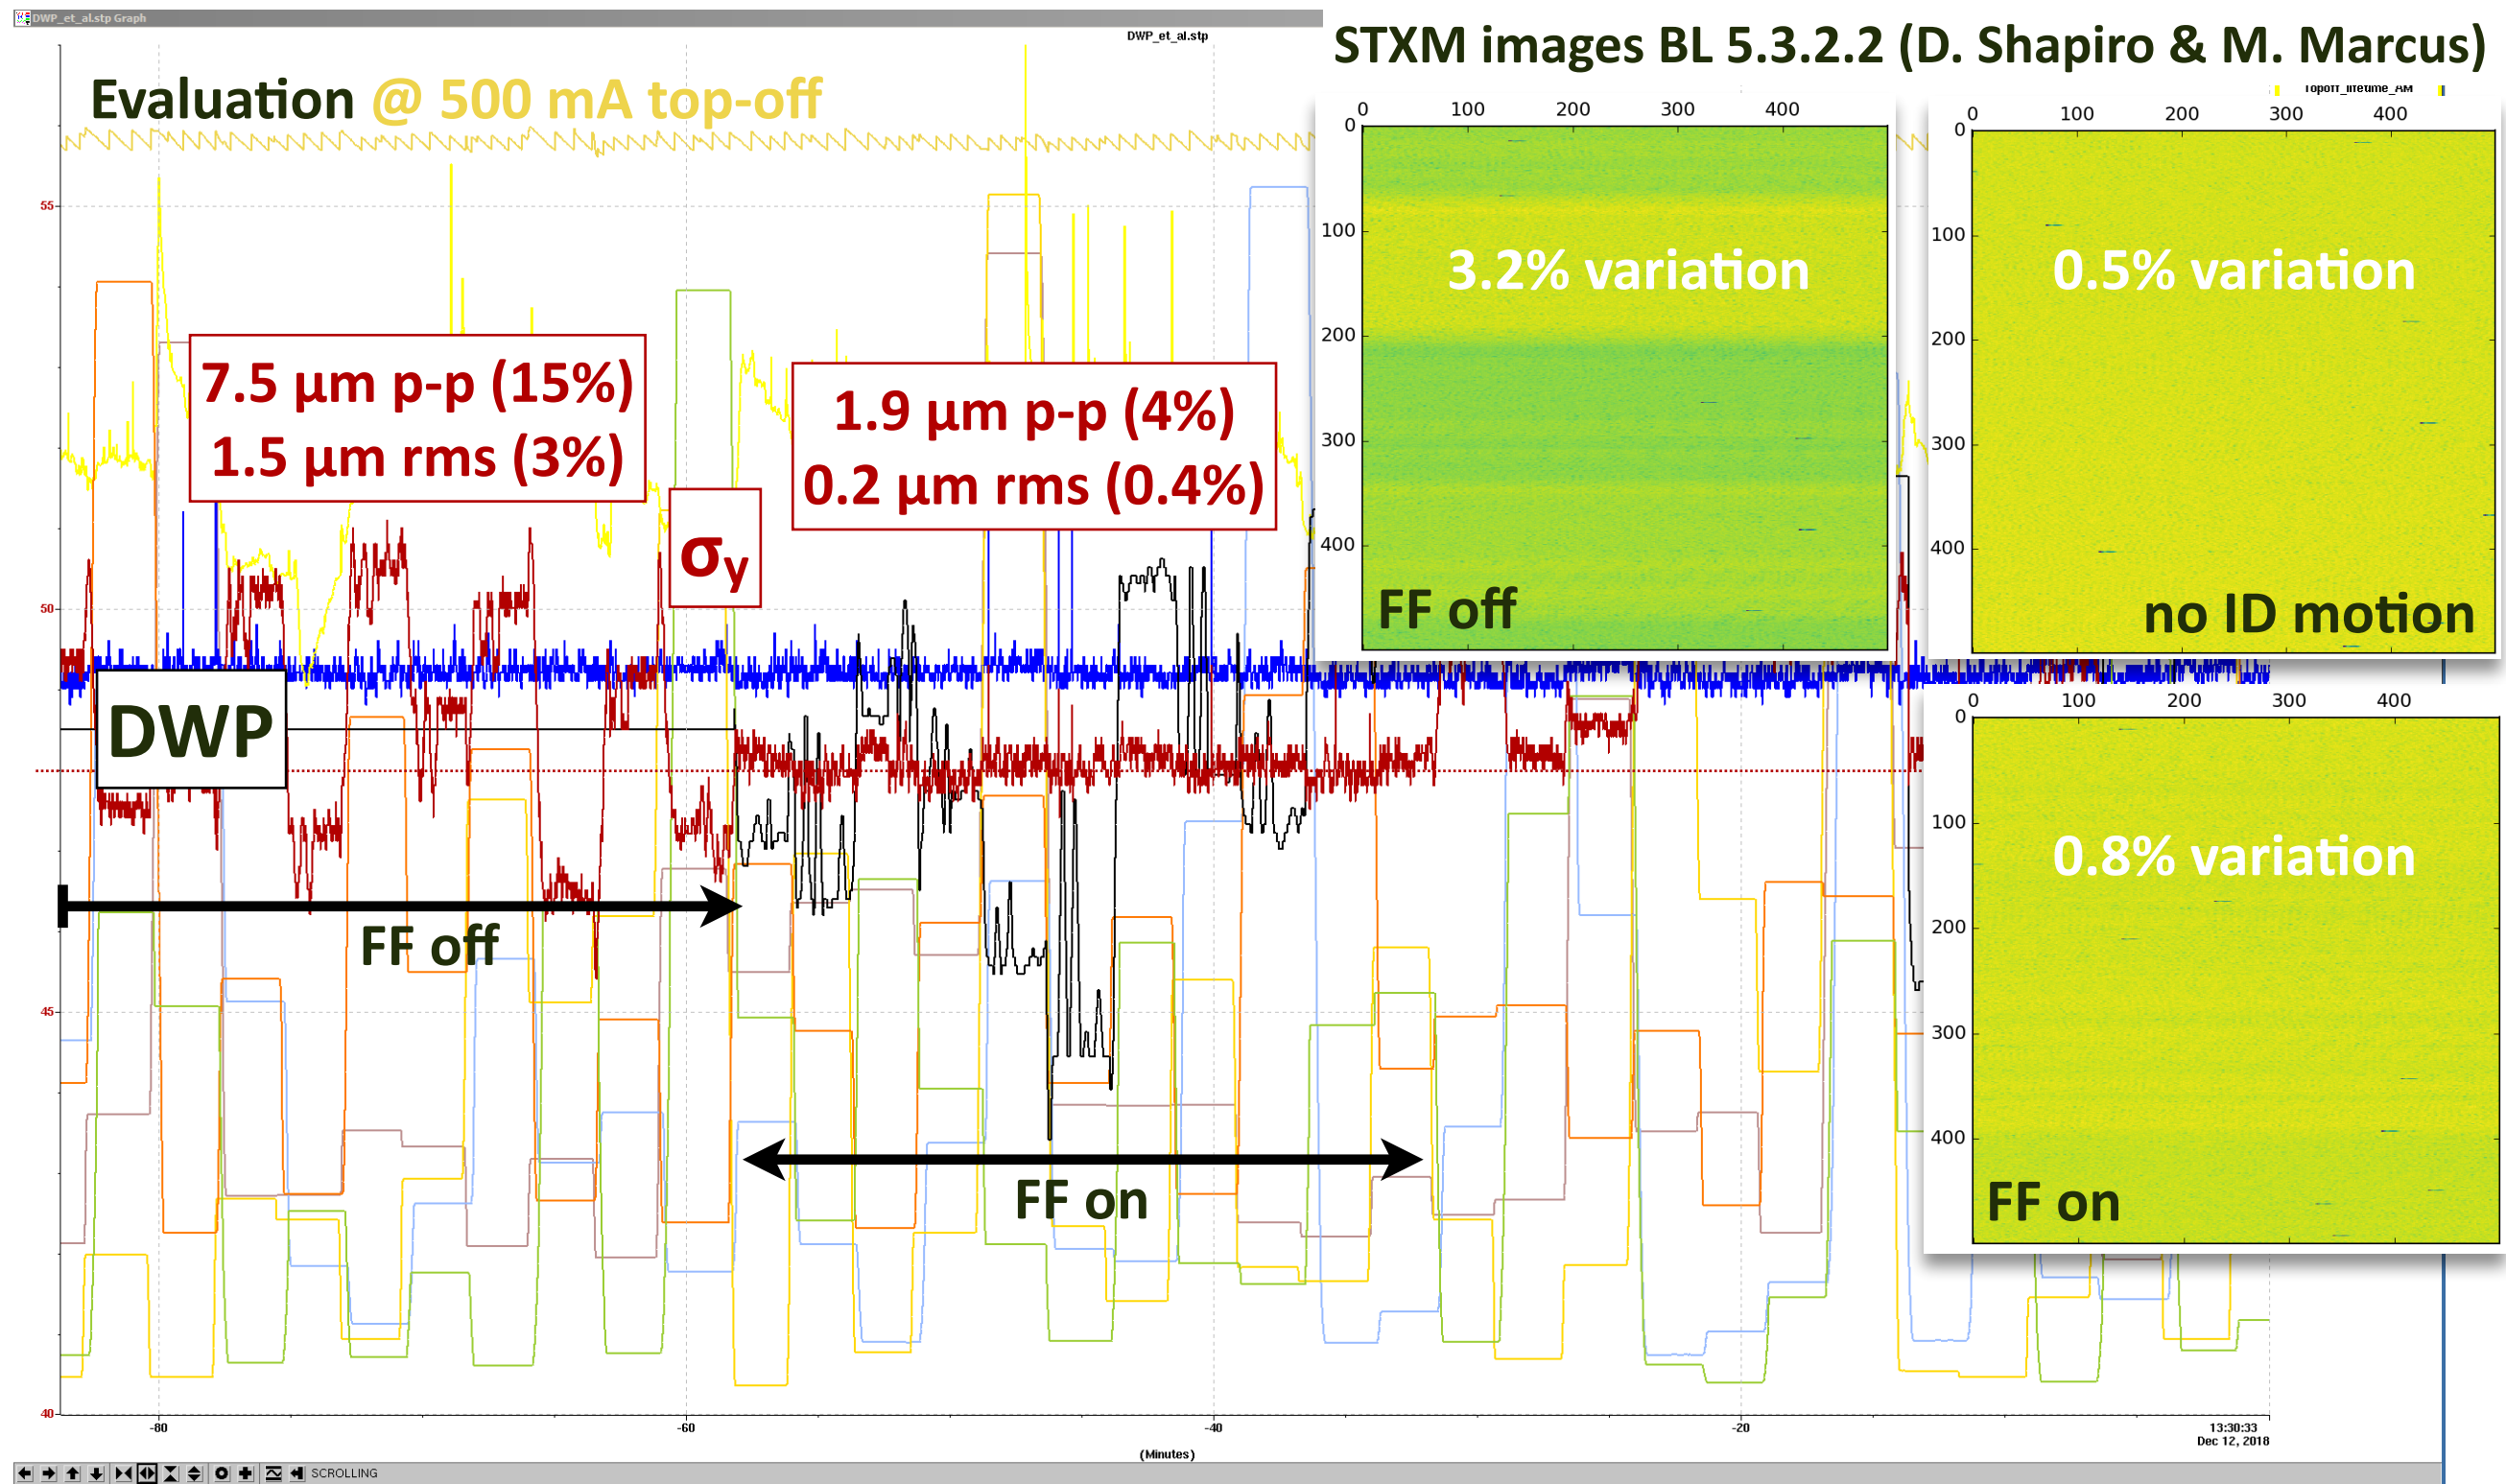


First Experiments During User Ops

- Use machine shift to acquire training data by scanning operational IDs in a quasi-randomized fashion (favoring operational gap range) → train NN
- Put this NN into FF operation during user ops and evaluate

Stabilization Confirmed During First User Ops Trial


DWP_et_al.stp Graph

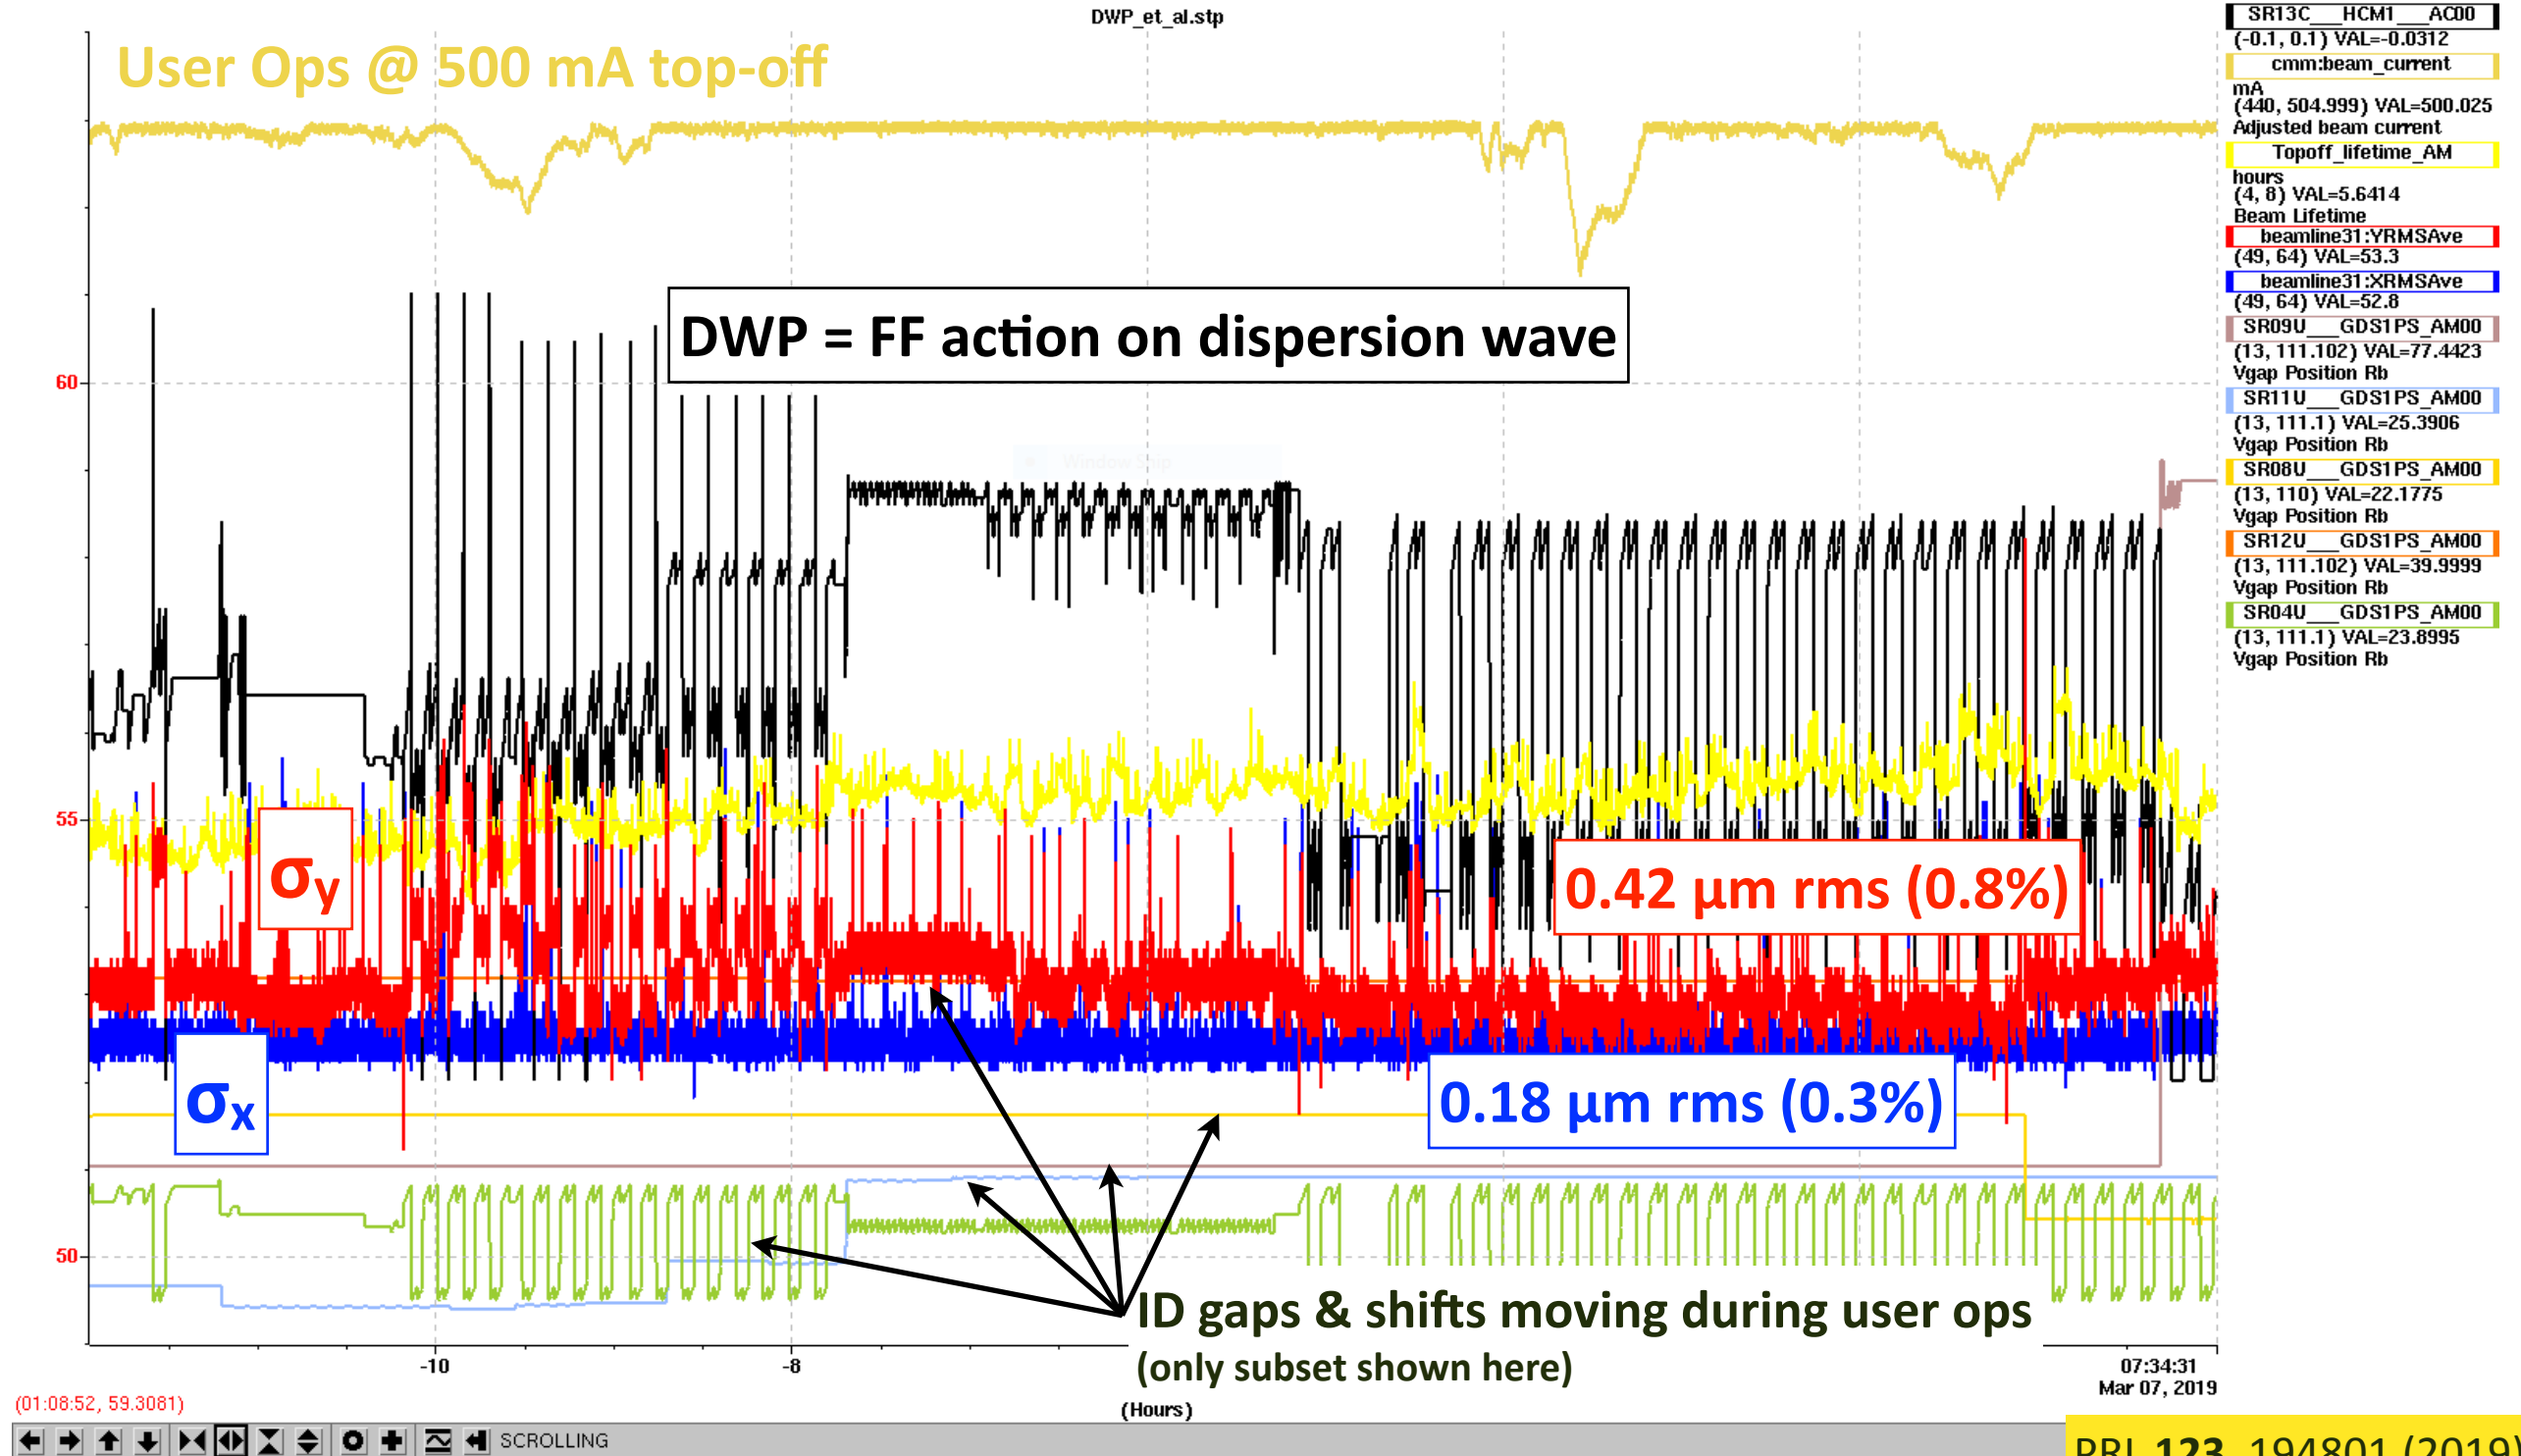

PRL 123, 194801 (2019)


Stabilization Confirmed During First User Ops Trial

DWP_et_al.stp Graph

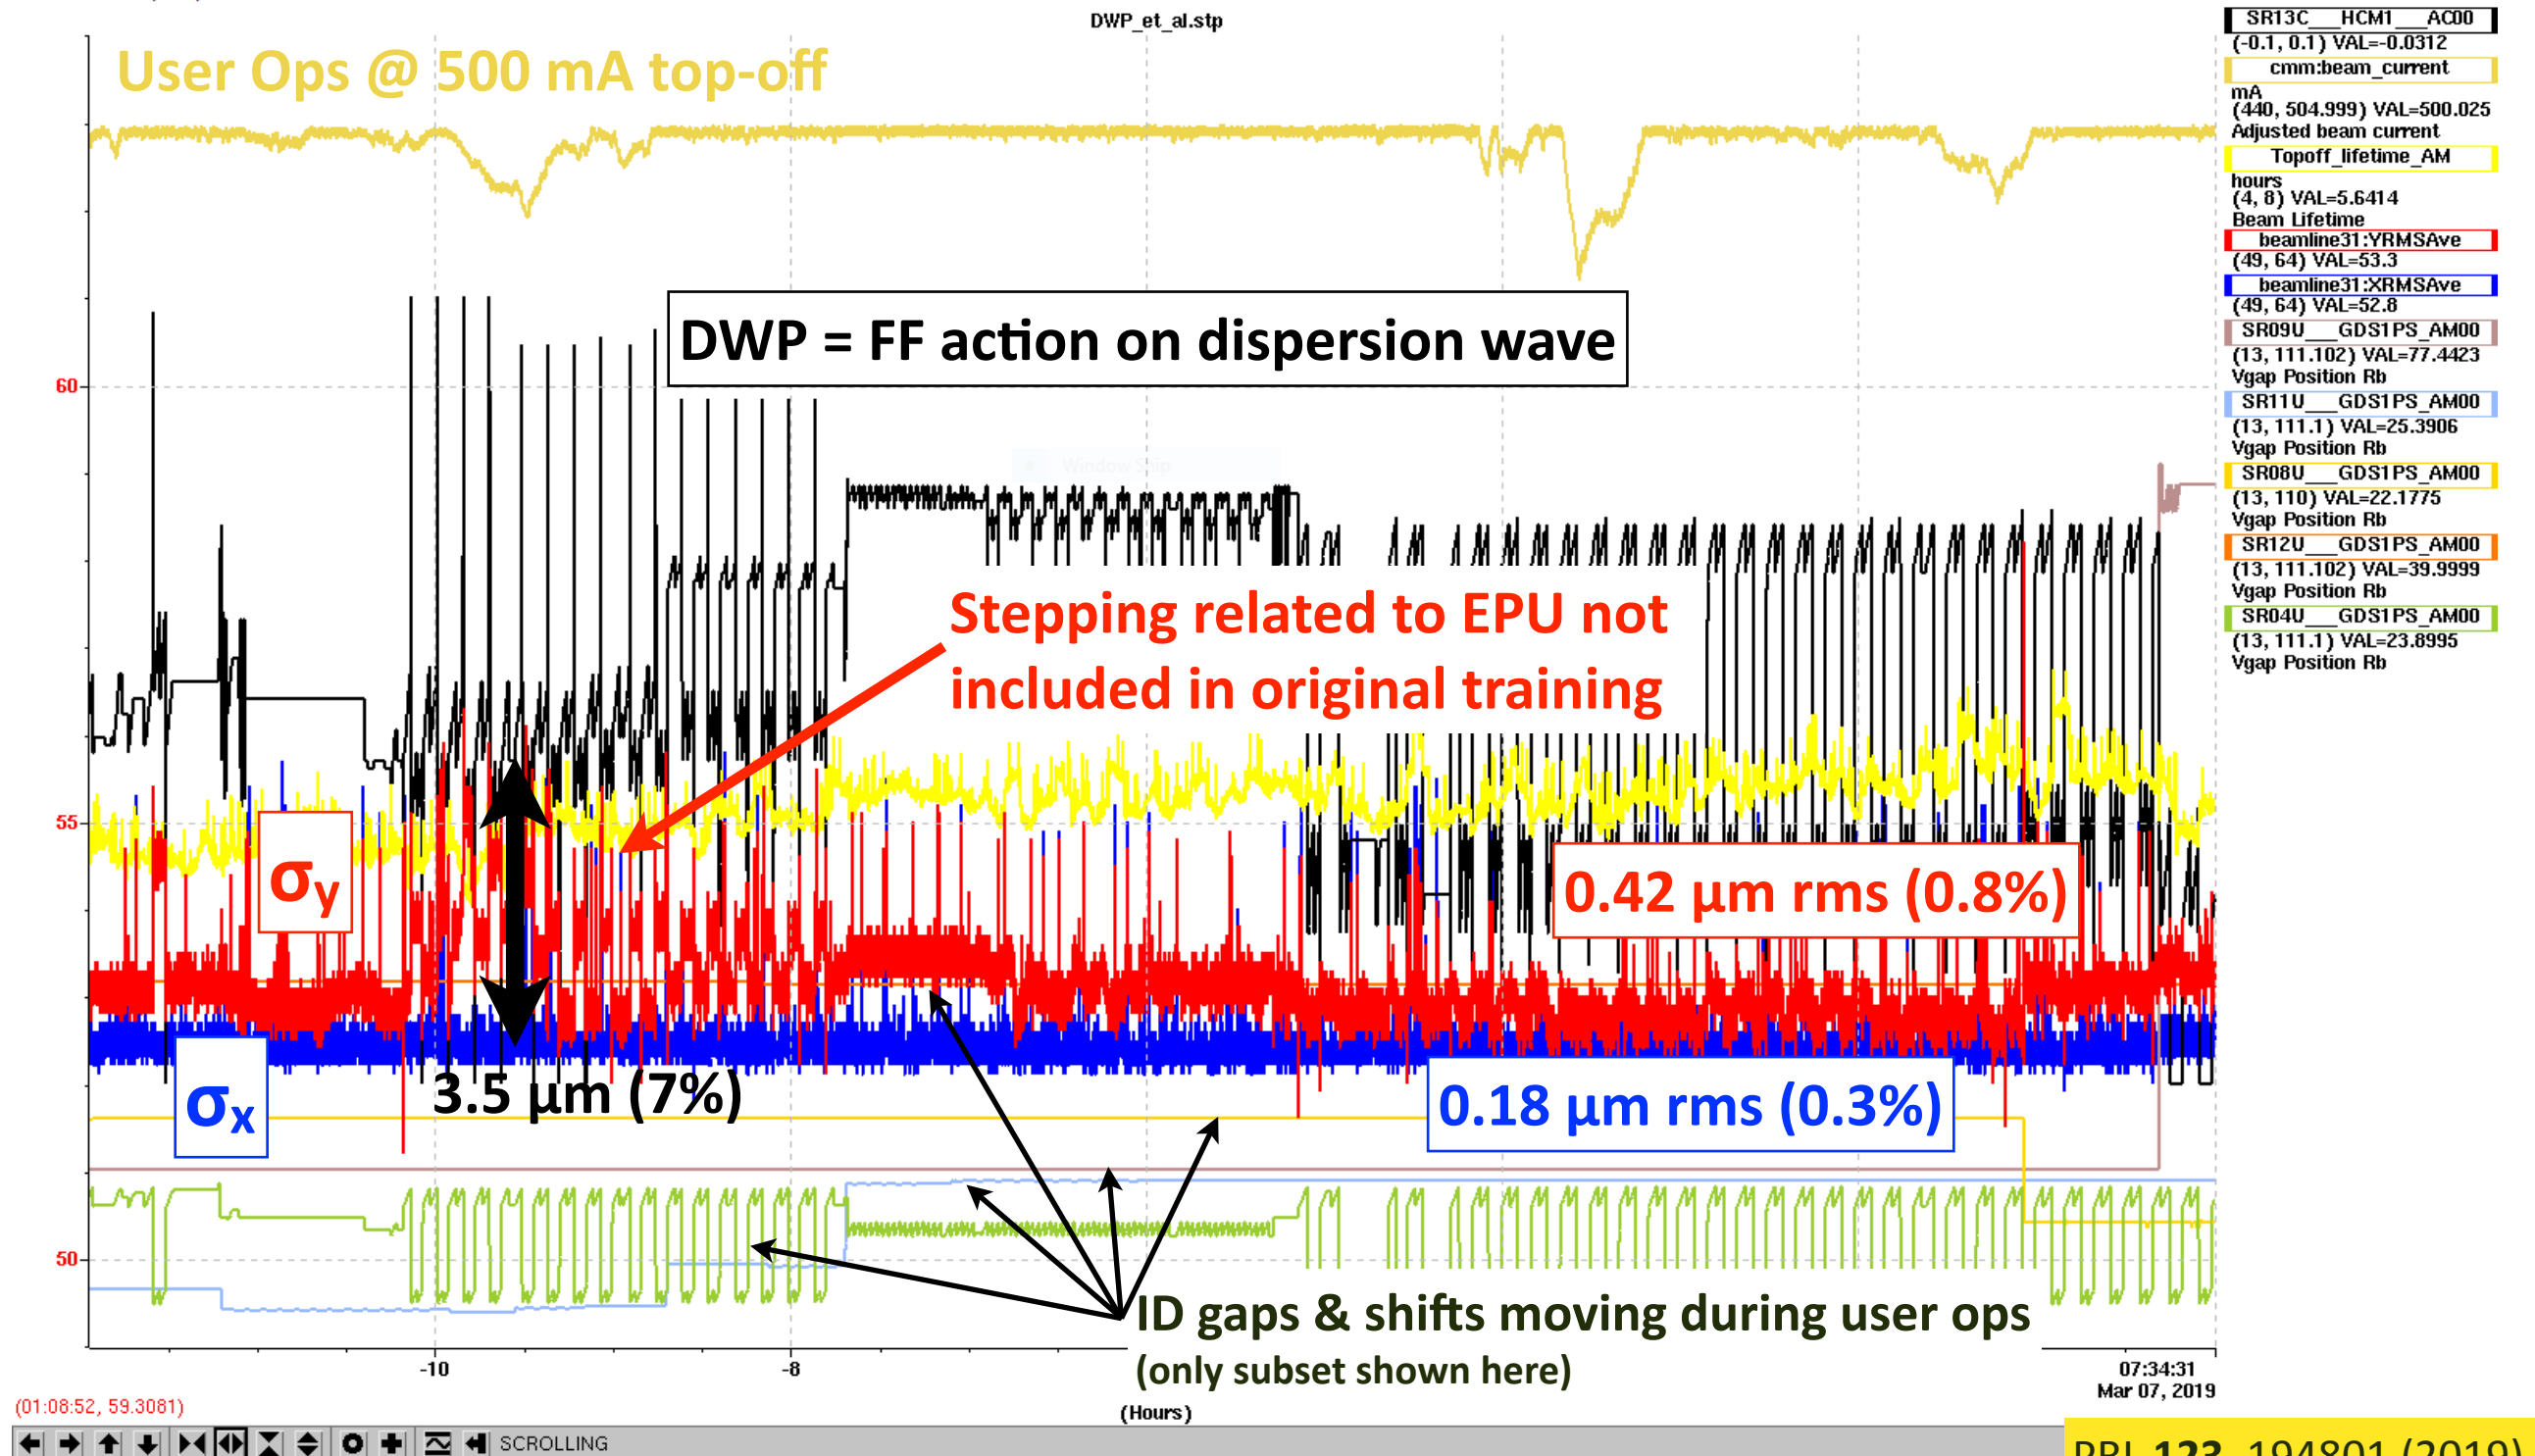


PRL 123, 194801 (2019)

Stabilization Confirmed During First User Ops Trial

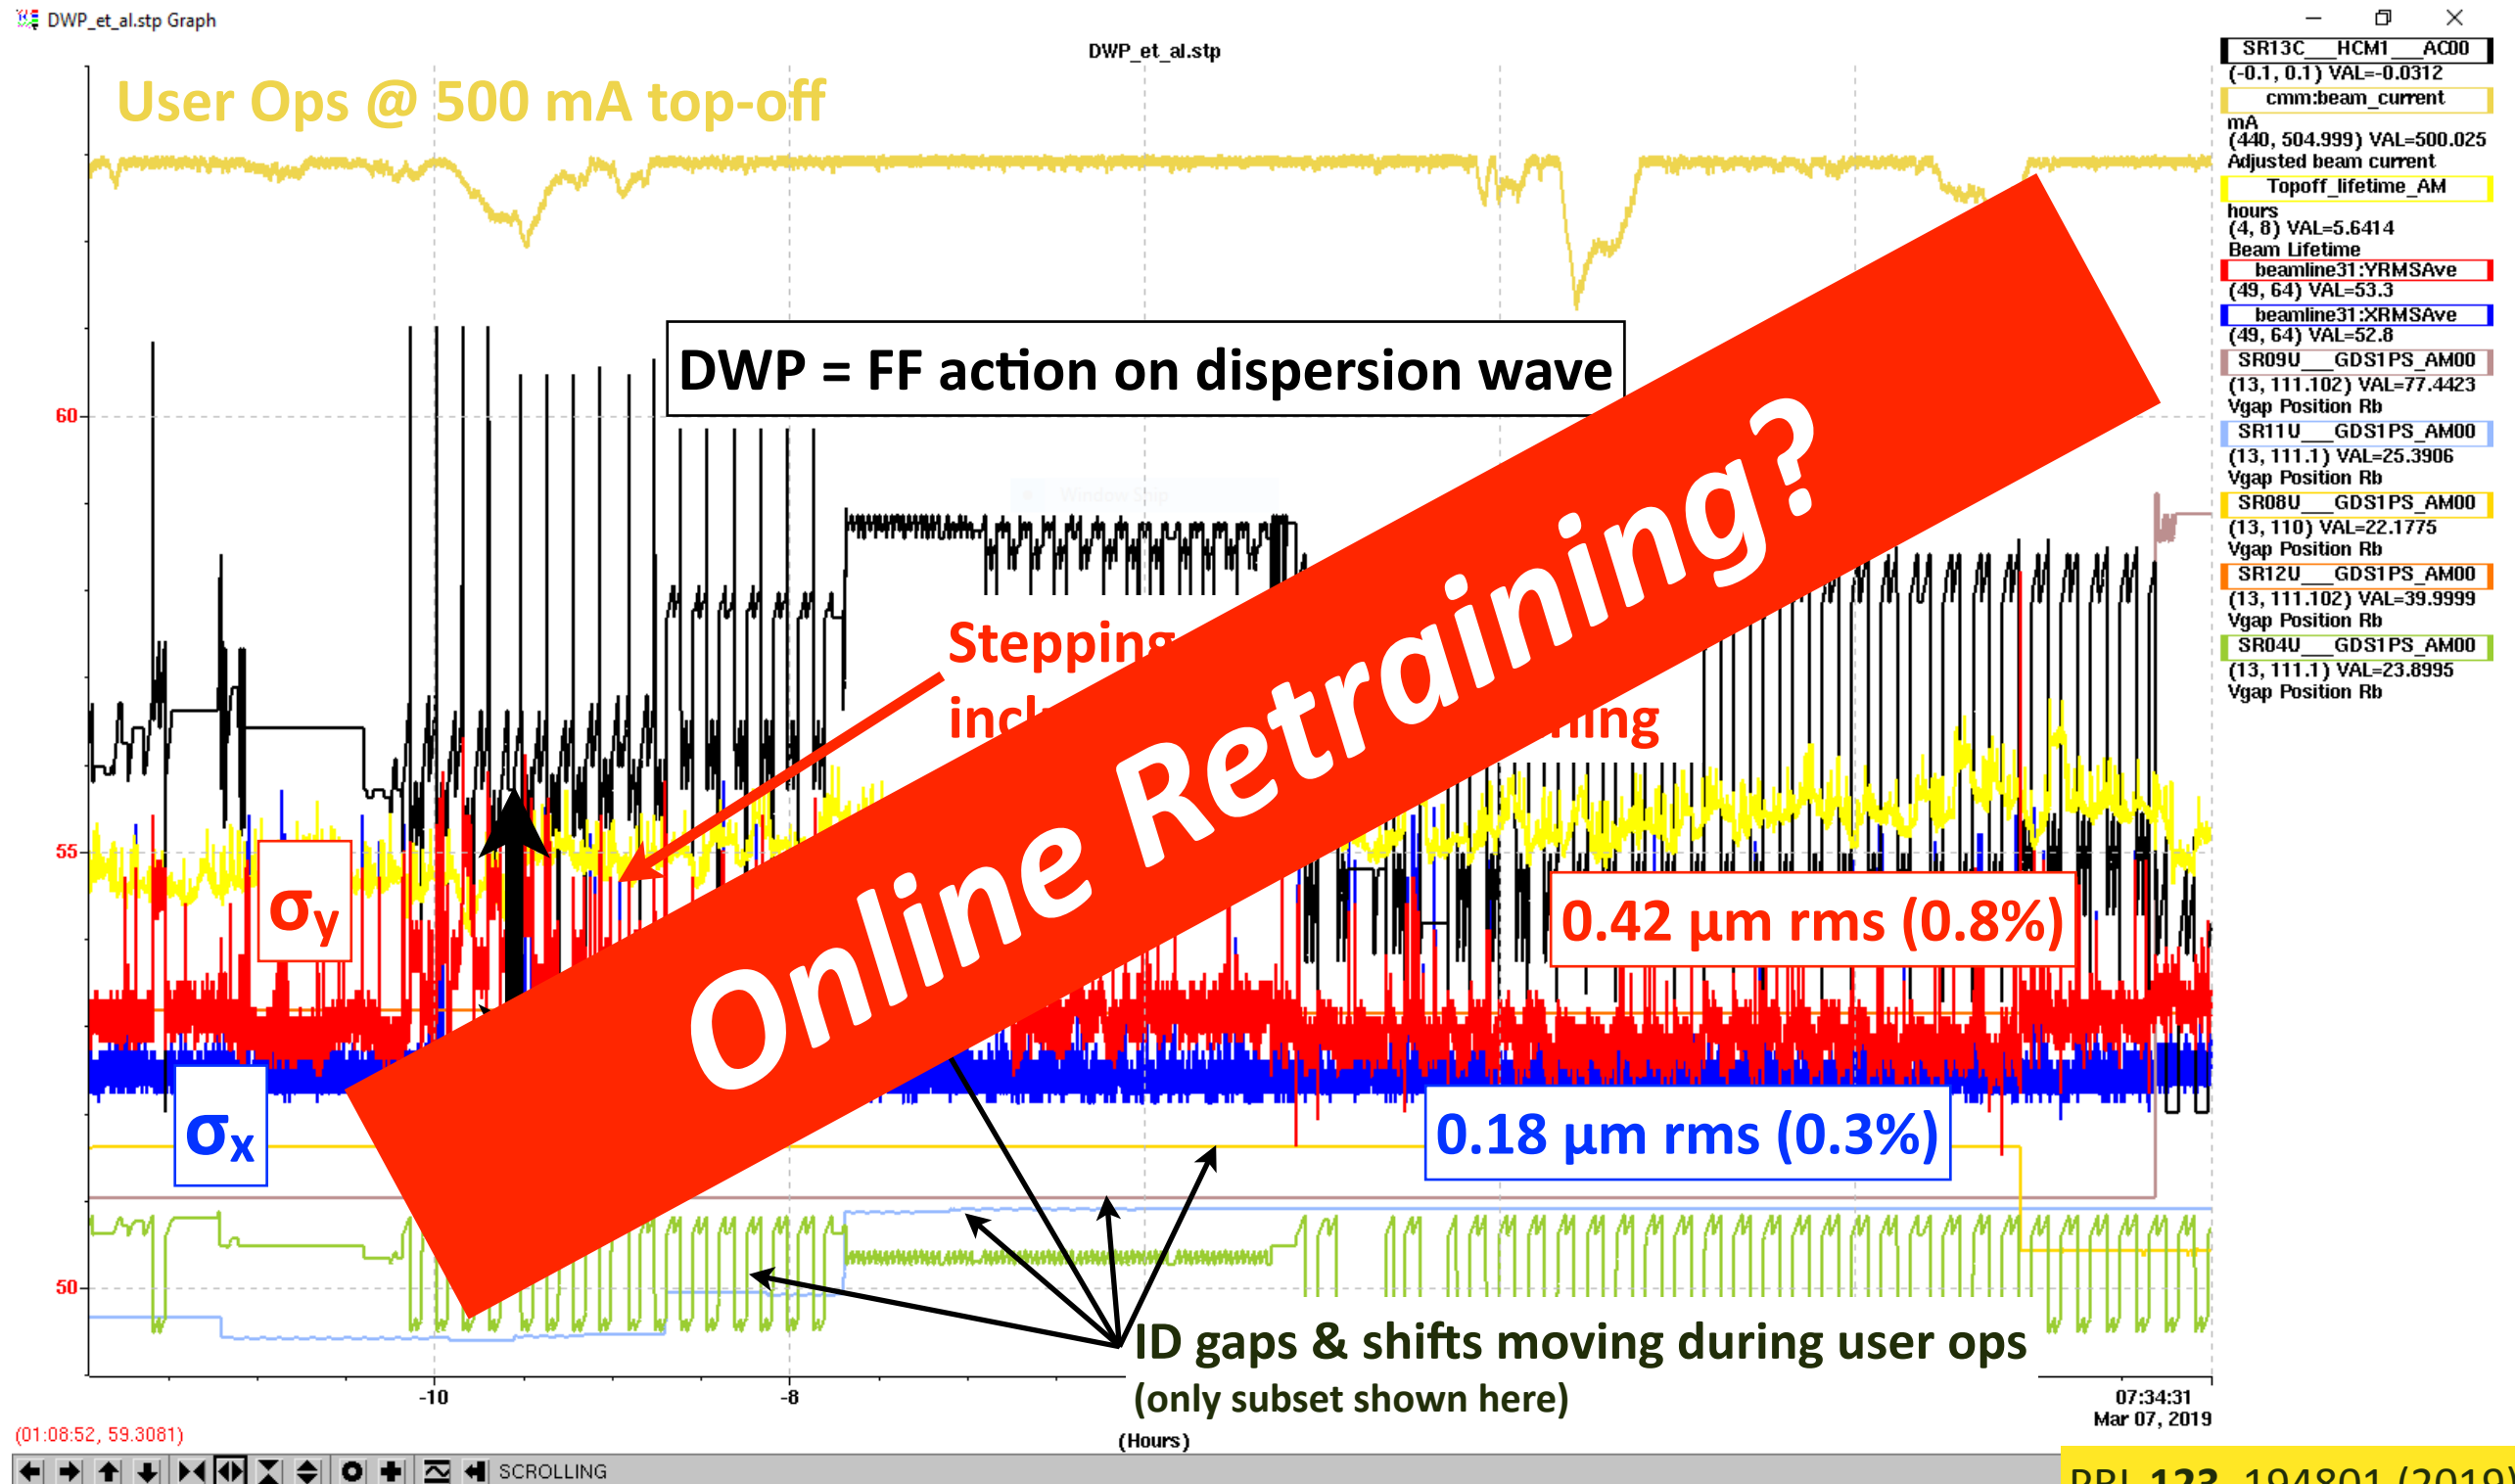

Online Retraining: Improve NN with User Ops Data


So far: "Conventional" Machine Learning

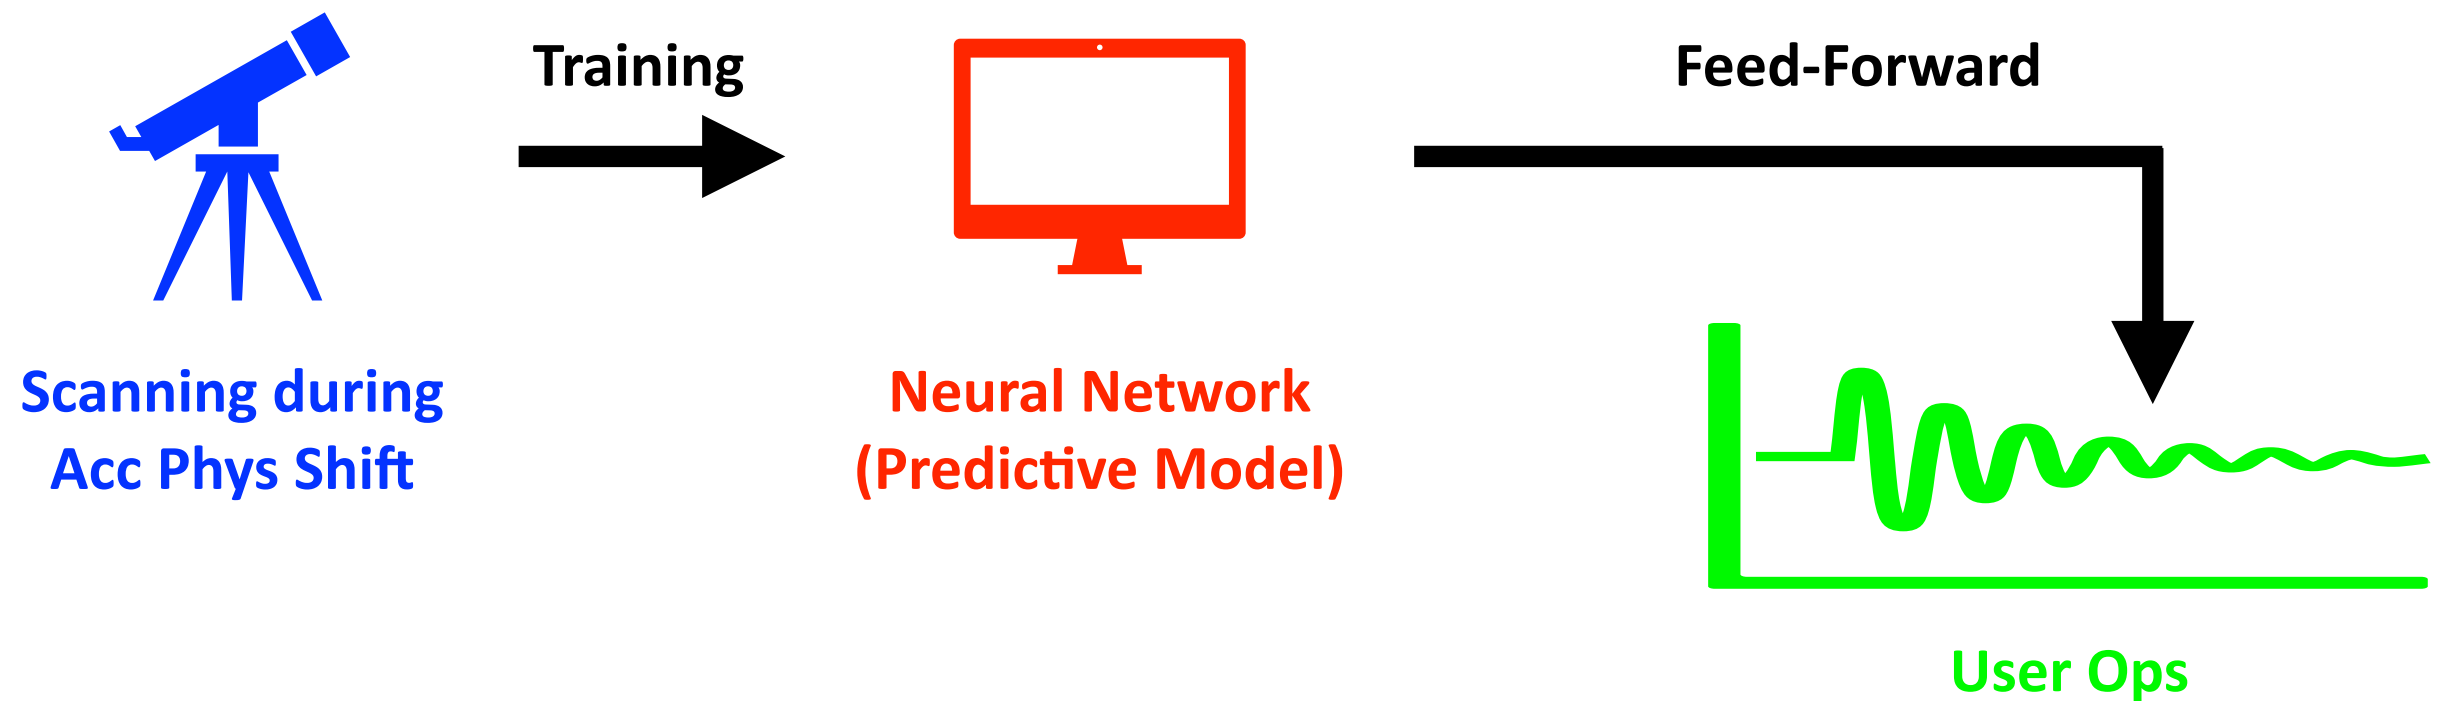

PRL **123**, 194801 (2019)

Online Retraining: Improve NN with User Ops Data


Online Retraining: apply user ops data to improve NN → swap NN used for ID FF on the fly

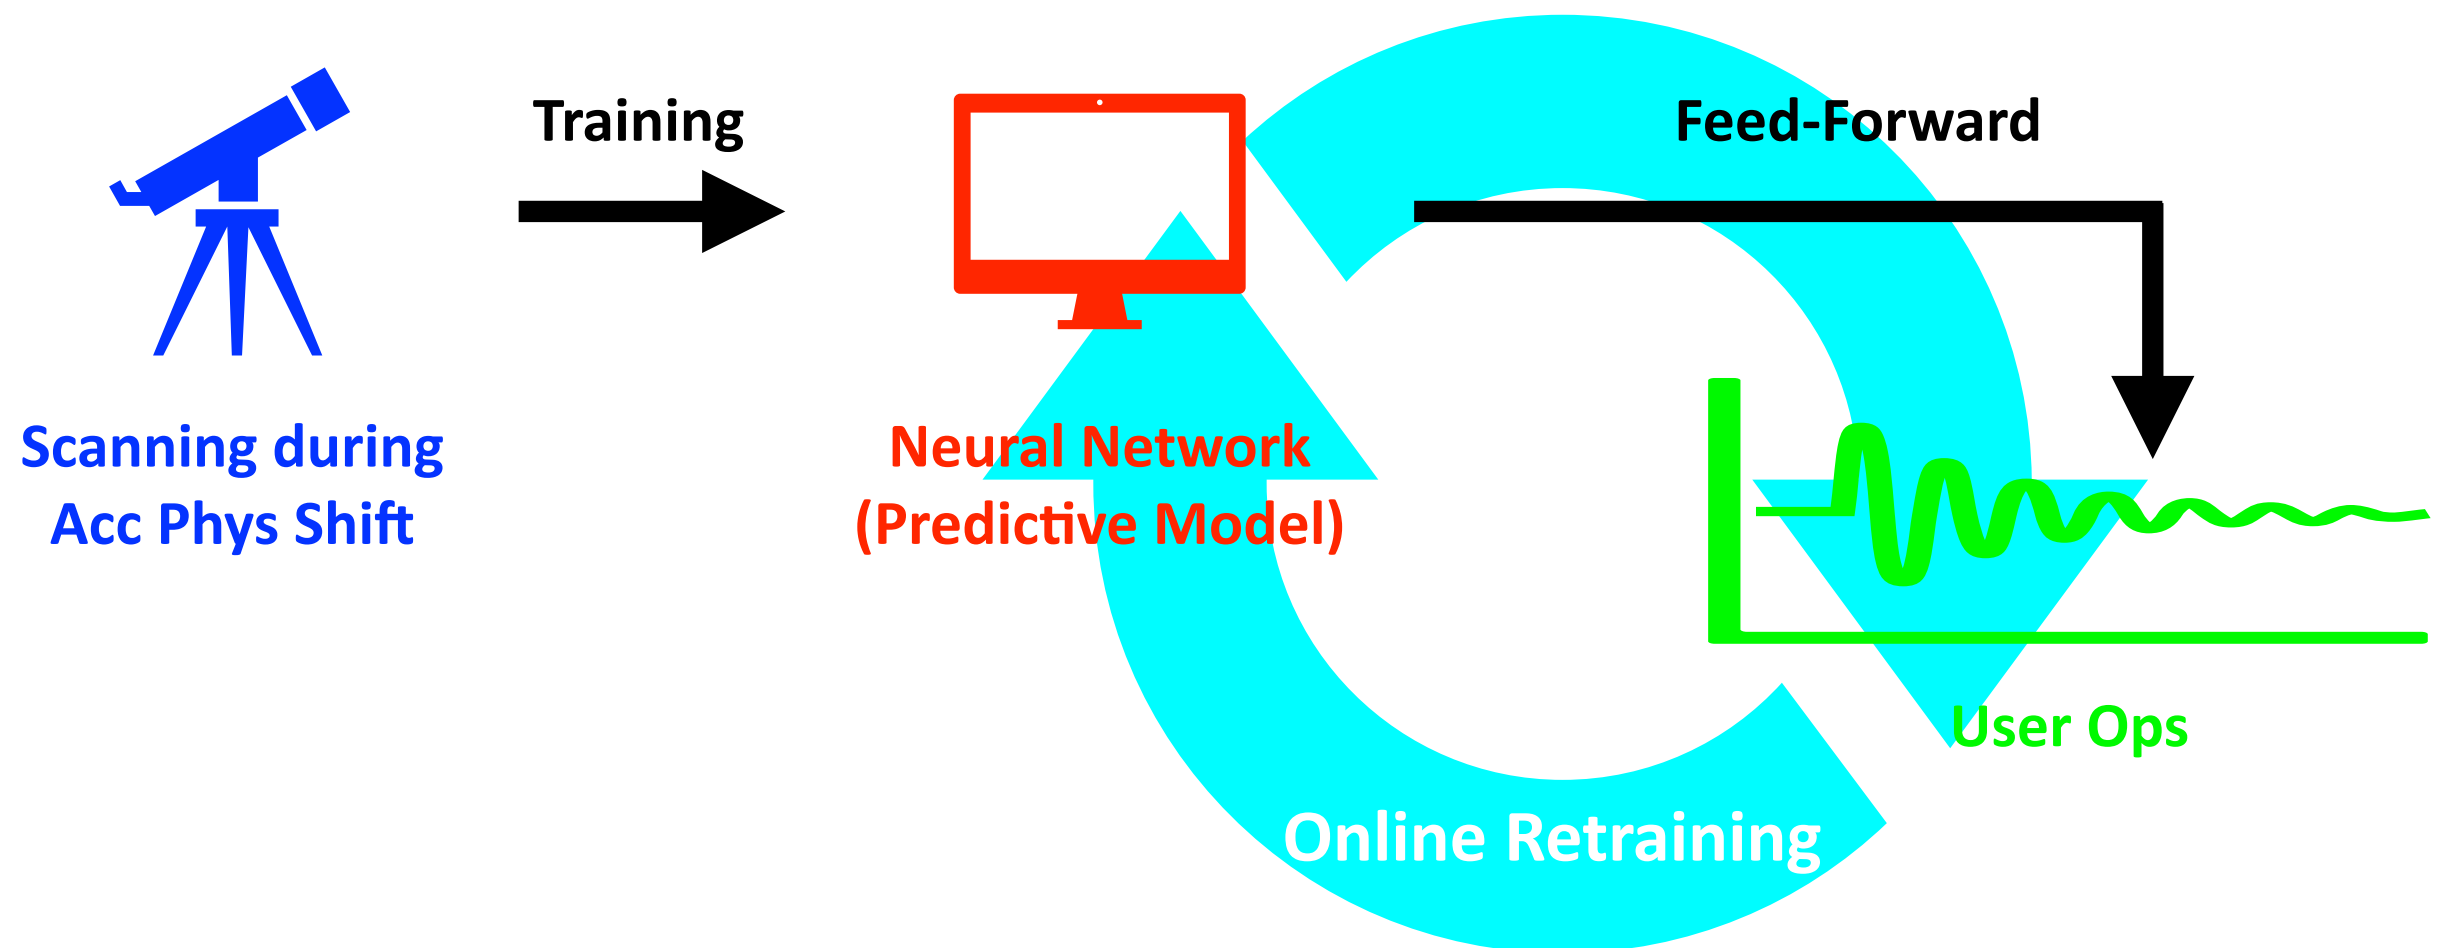


NN can be continuously online retrained during user ops to improve FF performance (exploiting huge amounts of data acquired during user ops)

PRL 123, 194801 (2019)


Substantial Improvement After Online Retraining

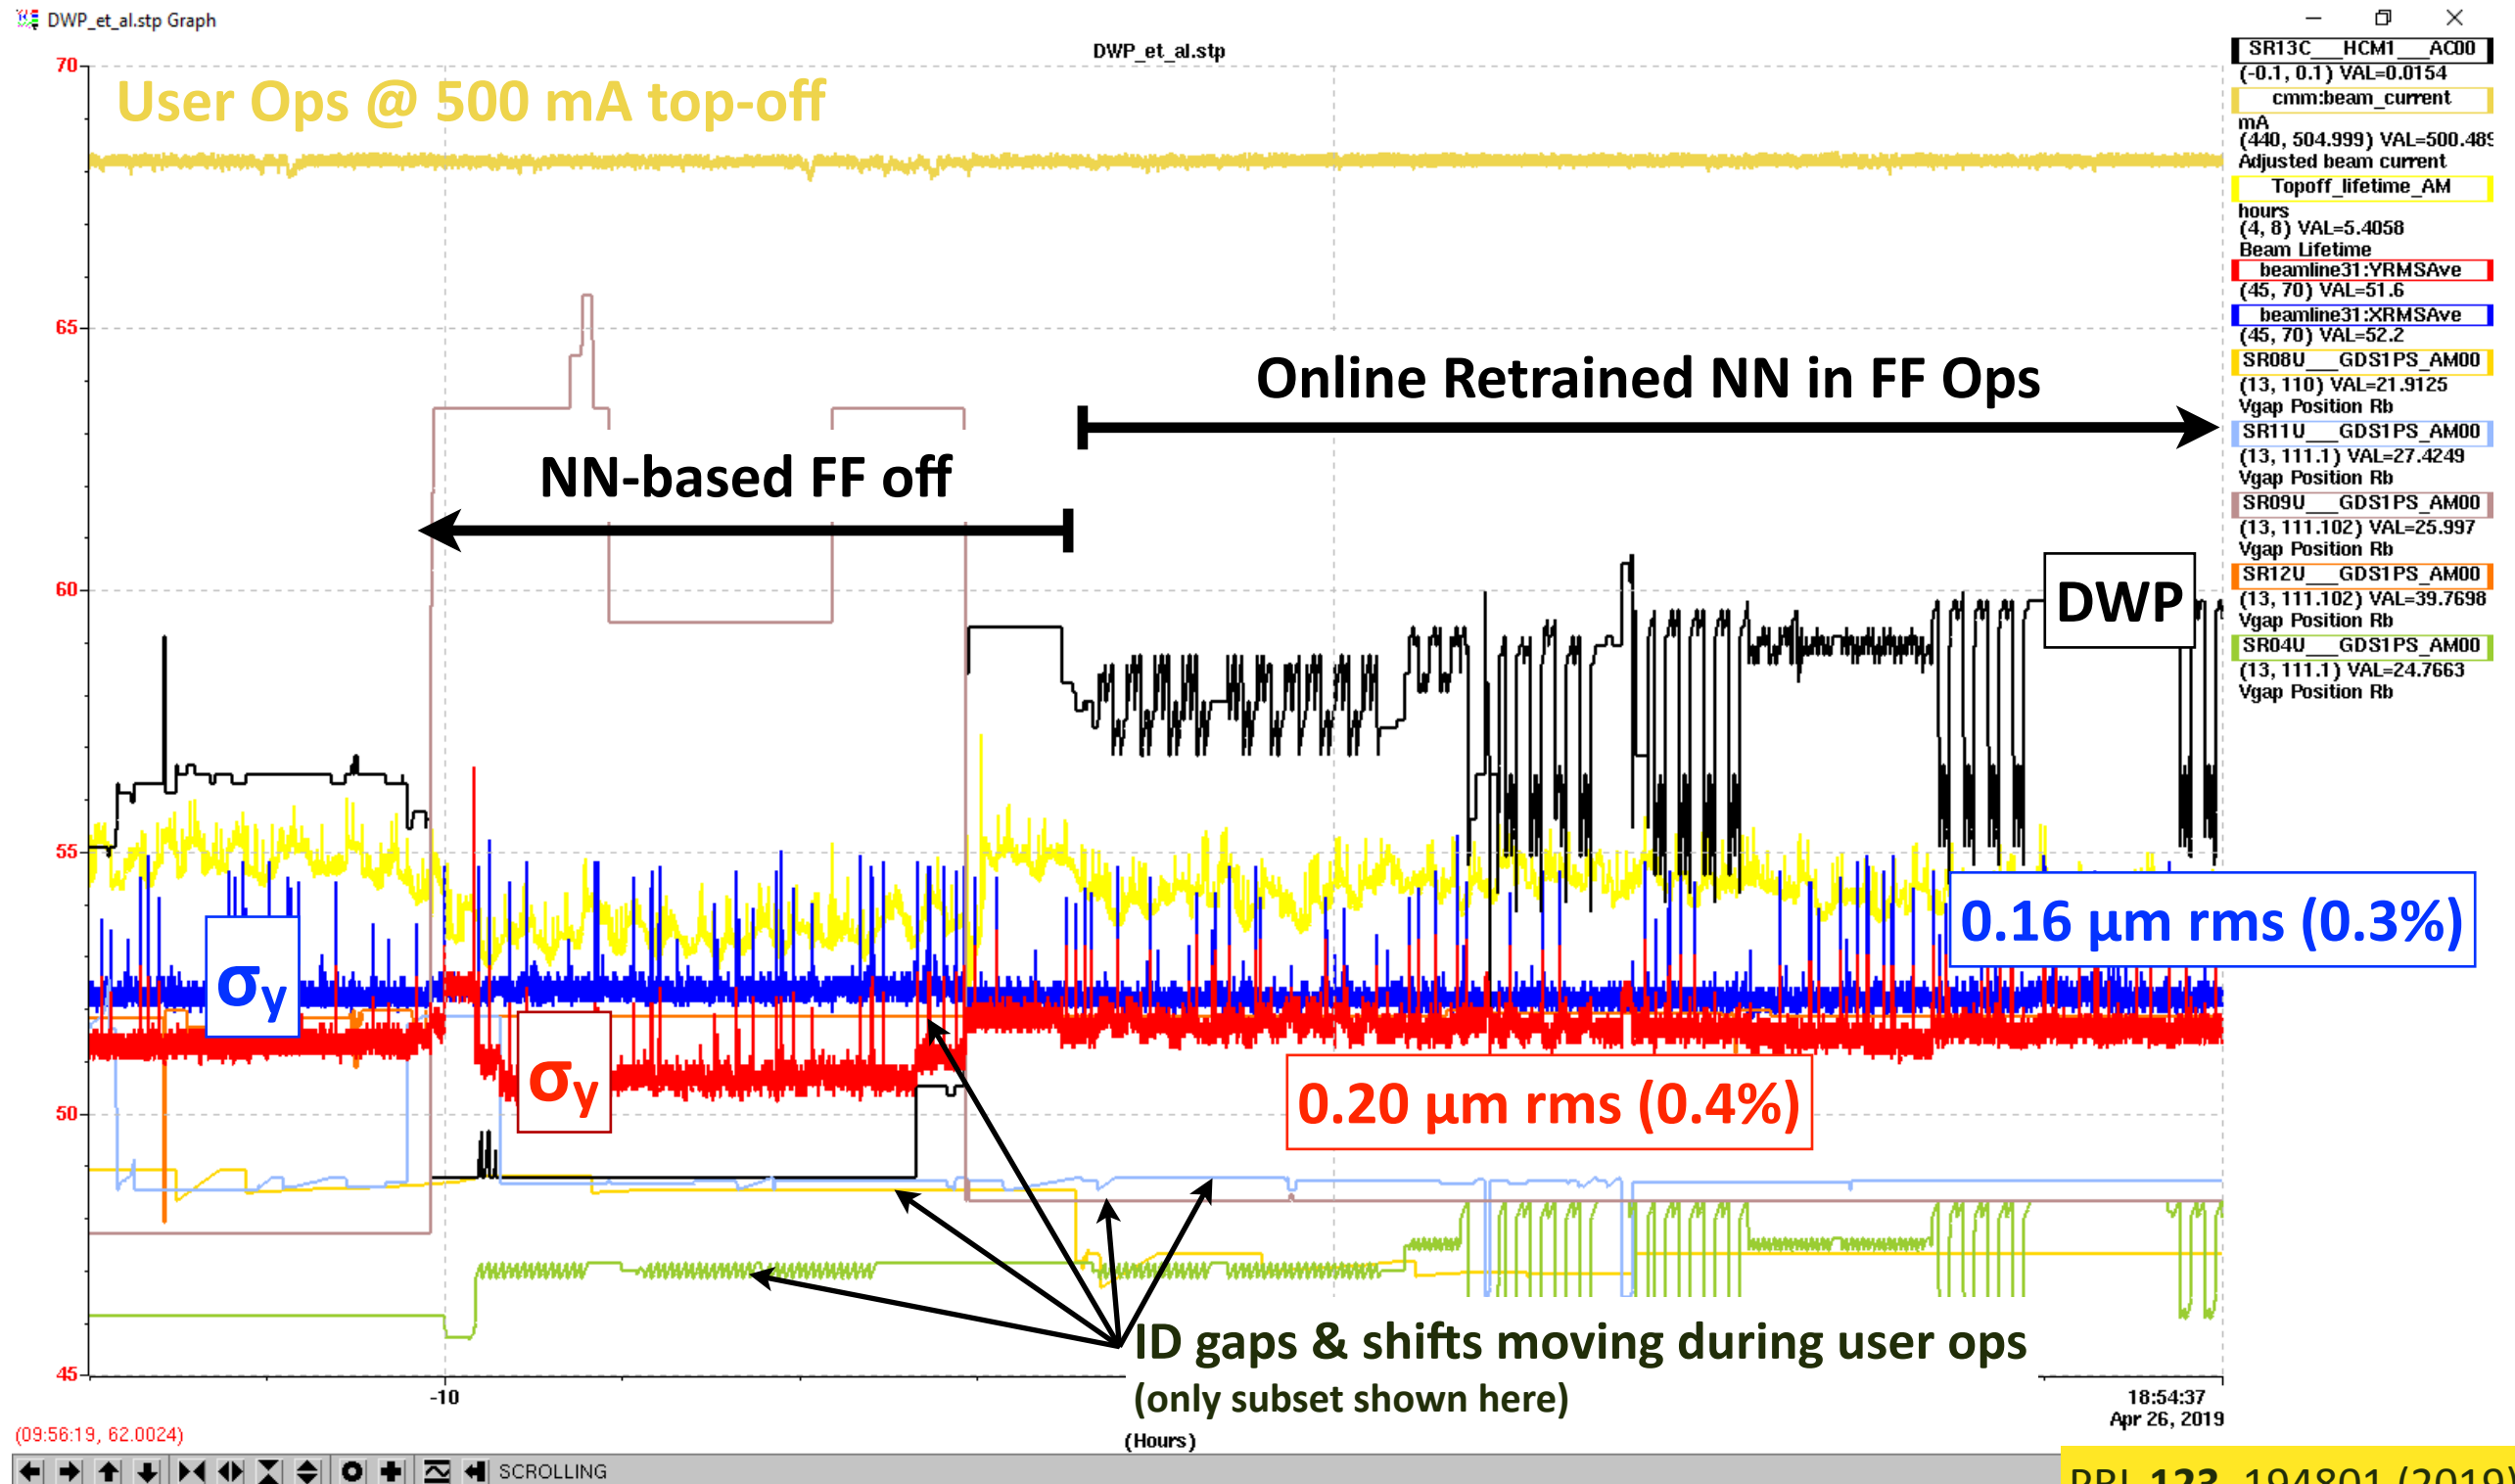

Substantial Improvement After Online Retraining

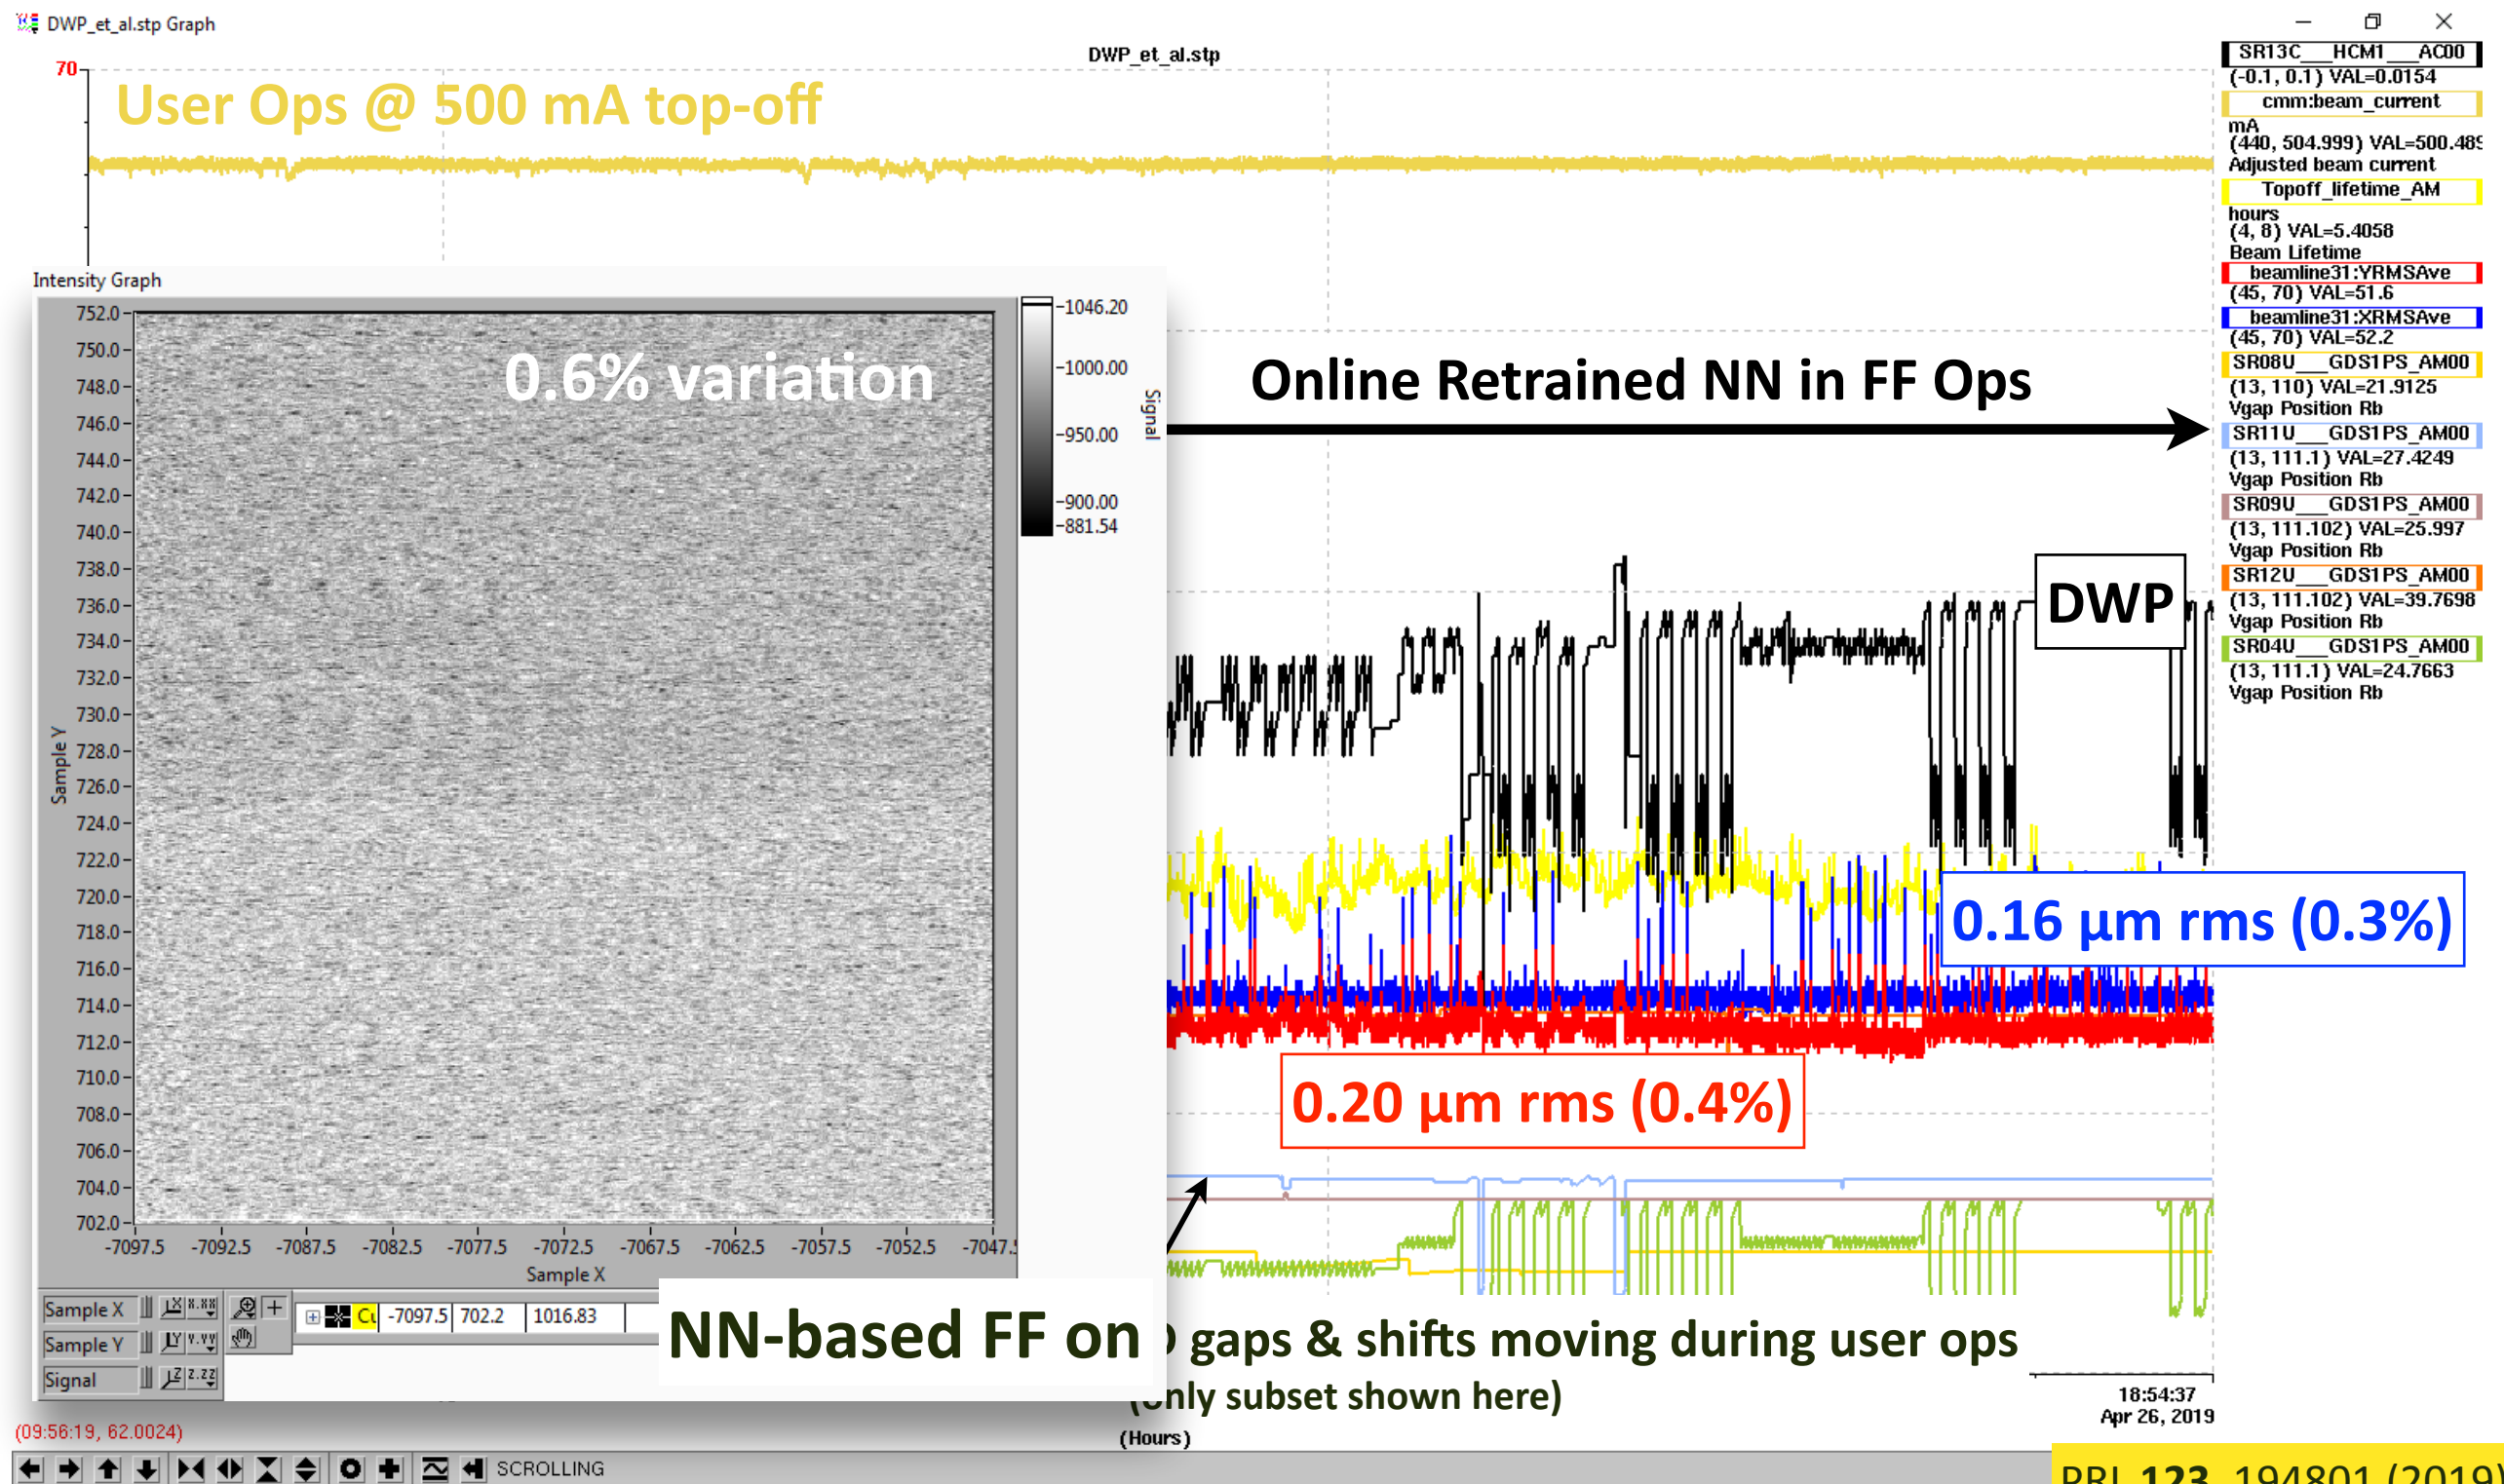


Results: NN-based FF Off vs. On During User Ops

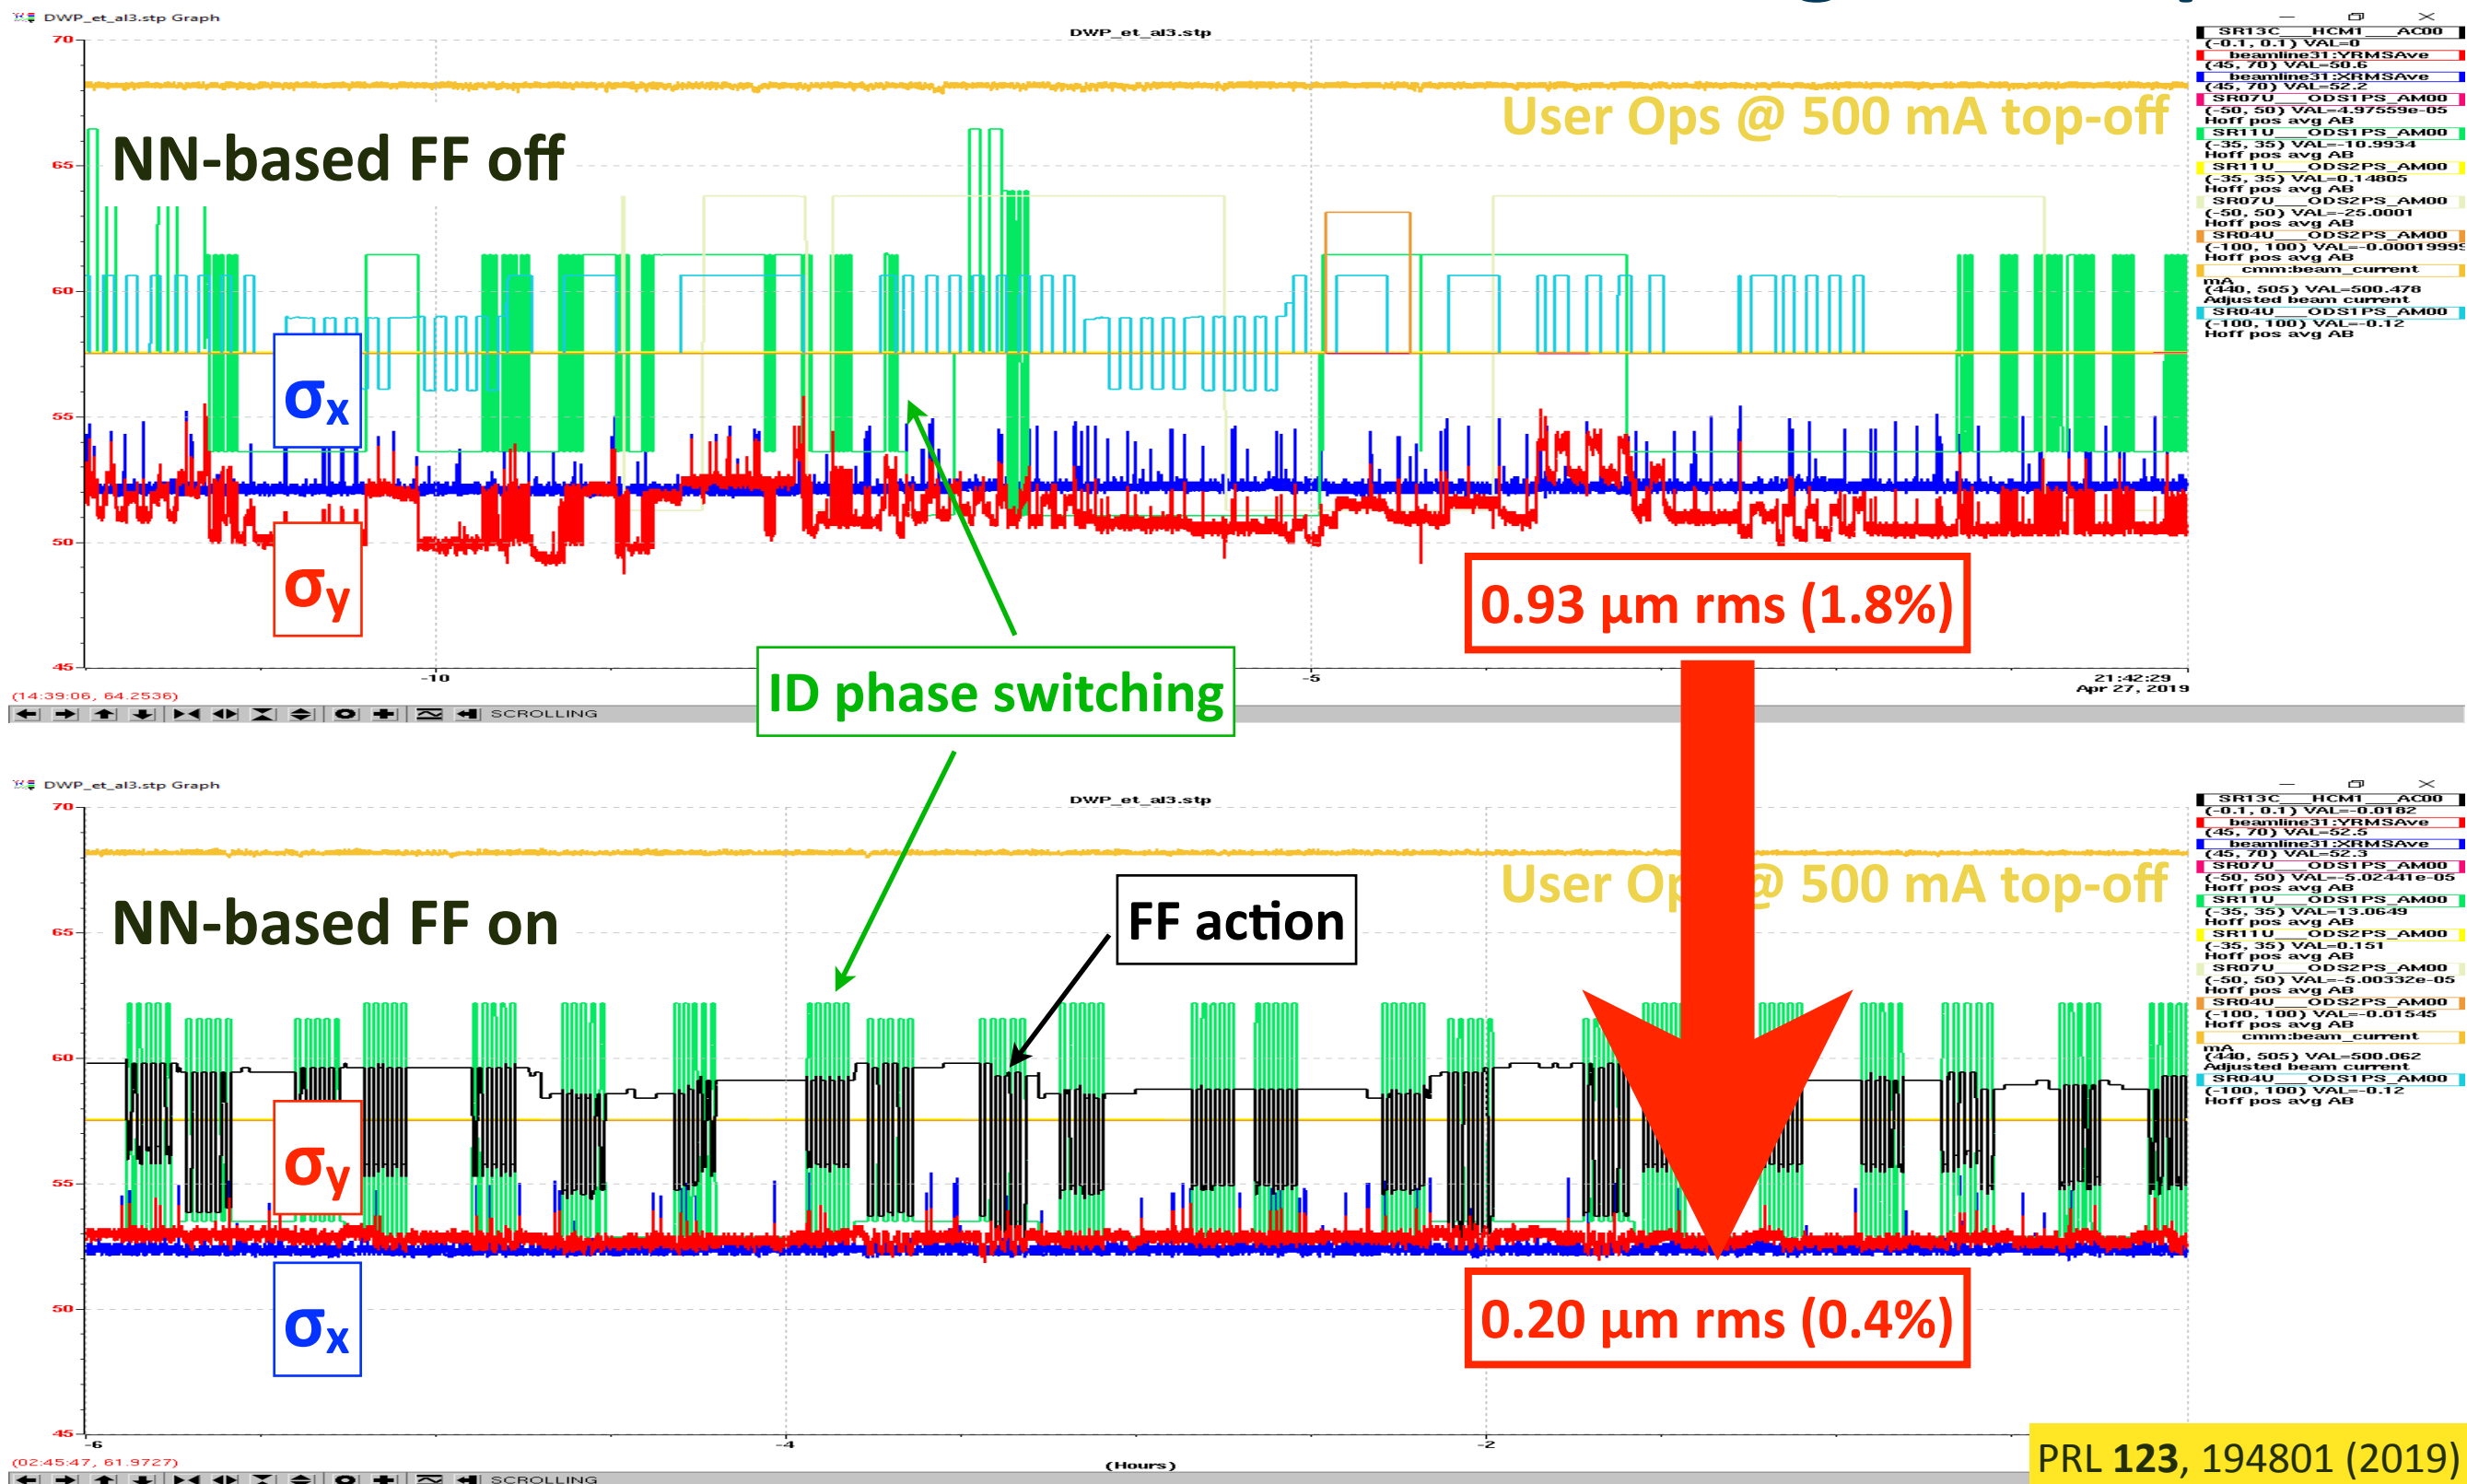


PRL 123, 194801 (2019)

Stabilization Confirmed at Experiment


ALS Beamline 5.3.2.2

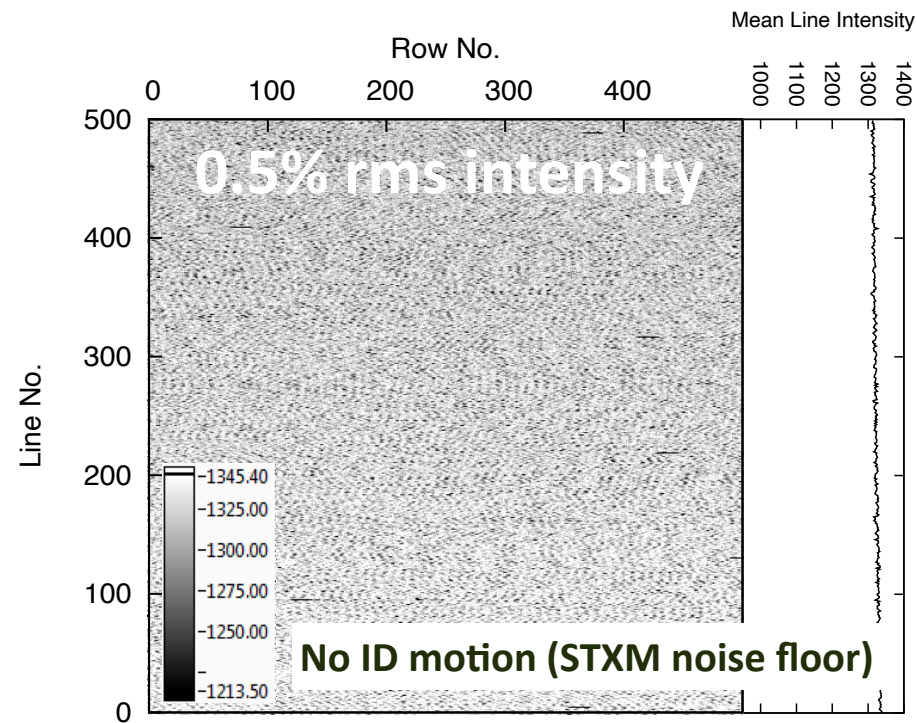


➔
ID Motion

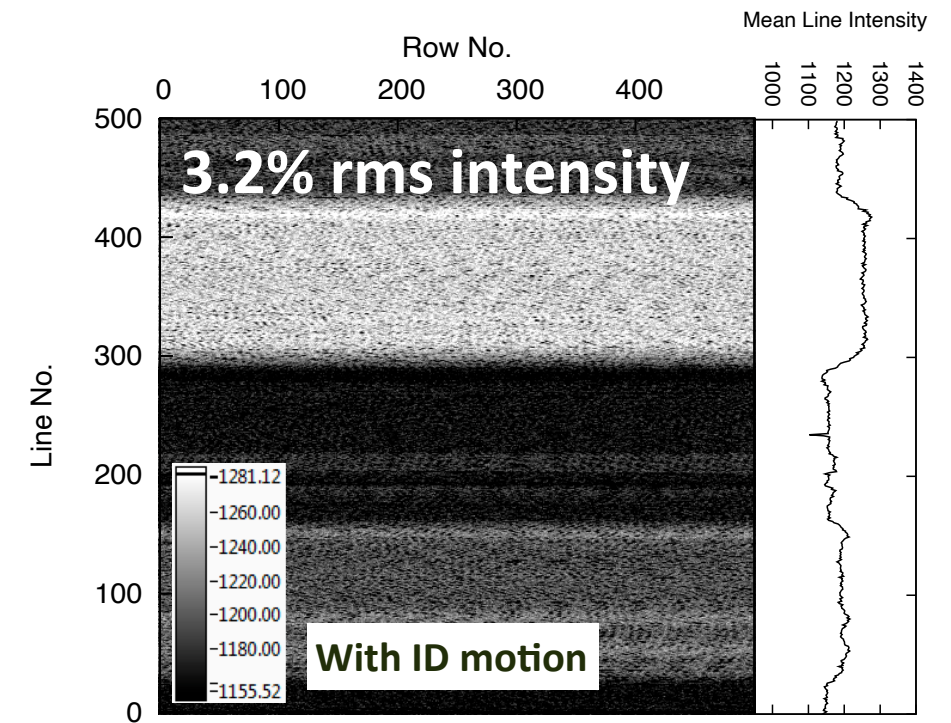

⬇
NN-based FF on

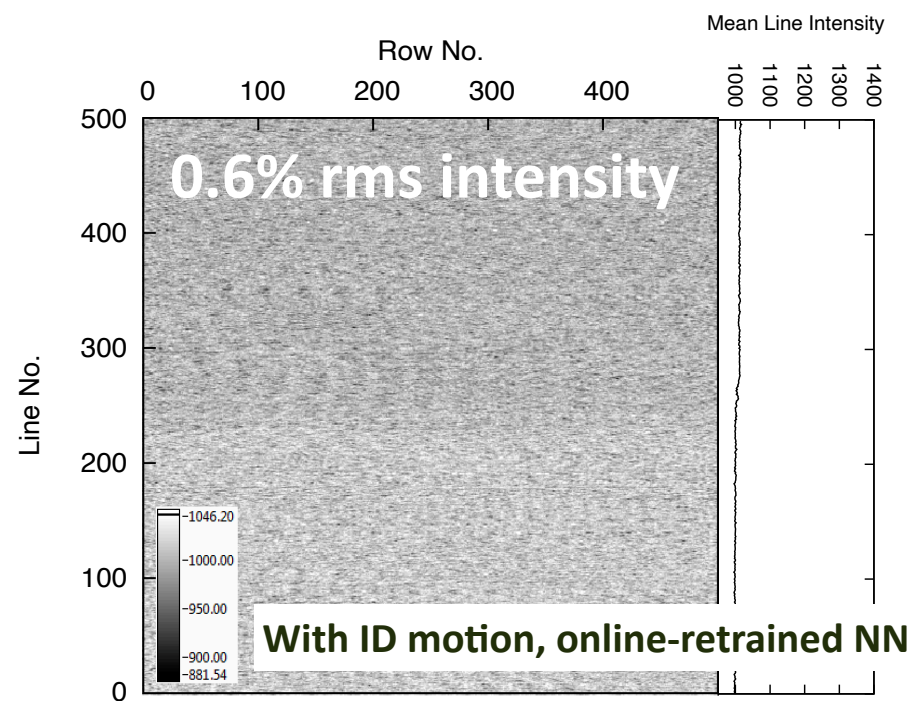

⬅
Online Retraining

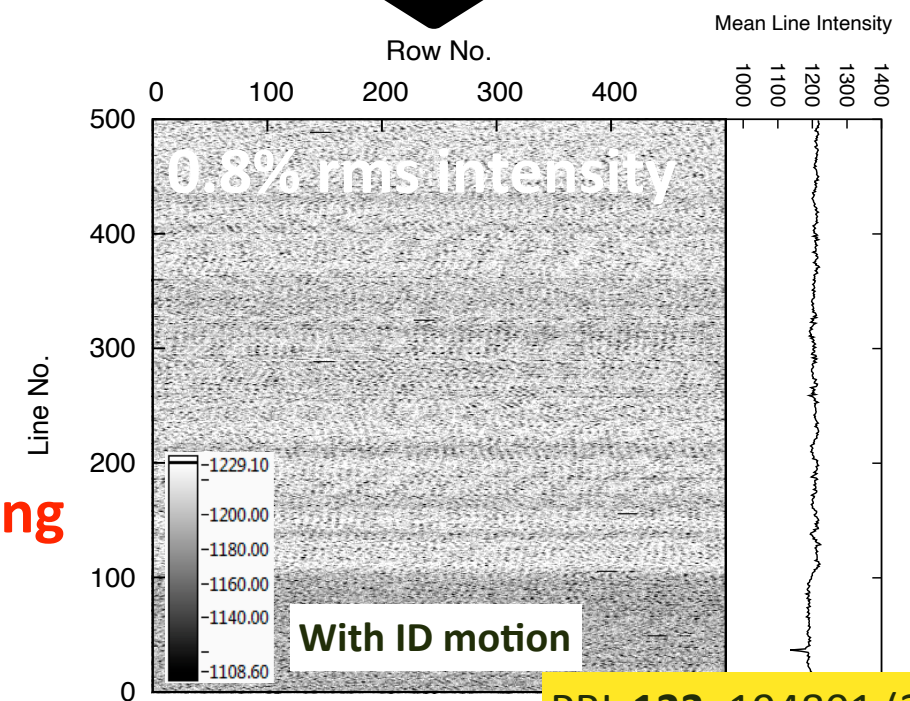

PRL 123, 194801 (2019)

Thank You!

Questions? → SCLeemann@lbl.gov

Acknowledgments: Shuai Liu, Hiroshi Nishimura, Matthew A. Marcus, David Shapiro, Changchun Sun, Nathan Melton, Alex Hexemer, Dani Ushizima, Mike Ehrlichman, Gregg Penn, Thorsten Hellert, Yuping Lu, Erik Wallen, Warren Byrne, Fernando Sannibale, Marco Venturini, Andreas Scholl



BERKELEY LAB



U.S. DEPARTMENT OF
ENERGY

Office of
Science

